Surface Approximation for Computer Graphics

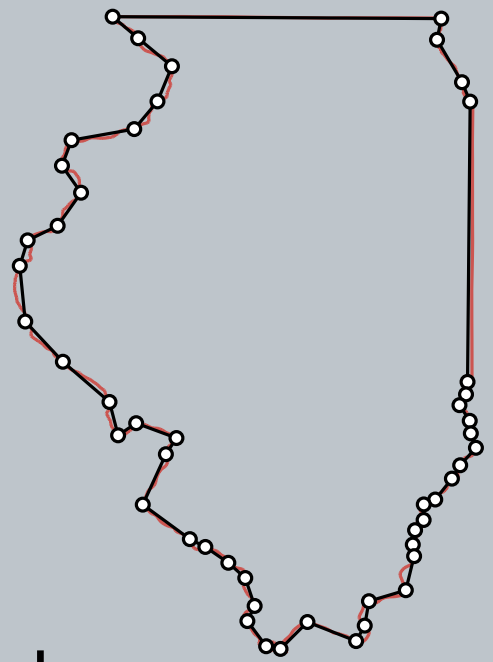

Michael Garland
University of Illinois at Urbana–Champaign

The Situation

- Resources are limited
  - disk, RAM, GPU, CPU, dpi, ...

- Many meshes are “bad”
  - too many triangles
  - triangles that poorly sample the surface

Our World-View

- *Interactive display* is the ultimate application
  - want something like 30 frames per second
- Polygons much smaller than a pixel don't really matter

The Problem

Blindly Regular Meshes

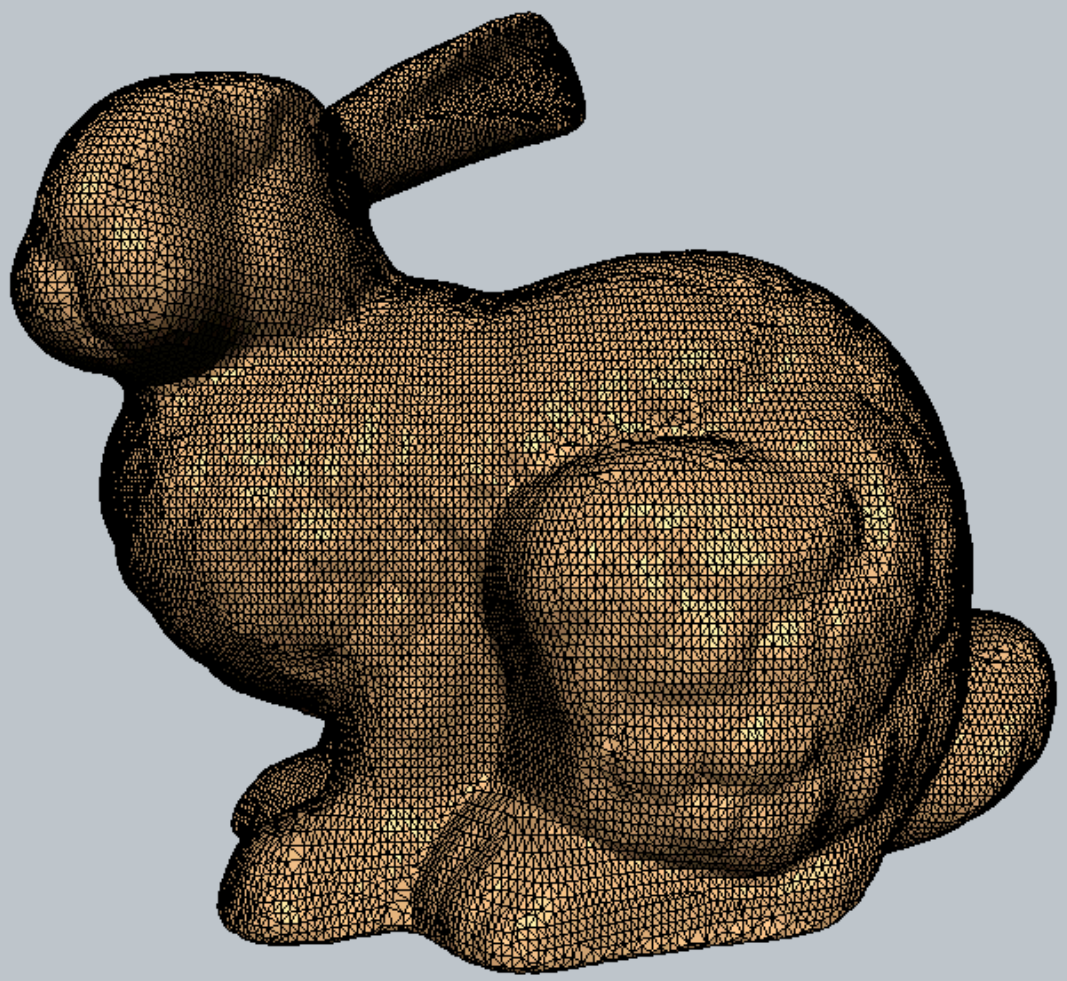

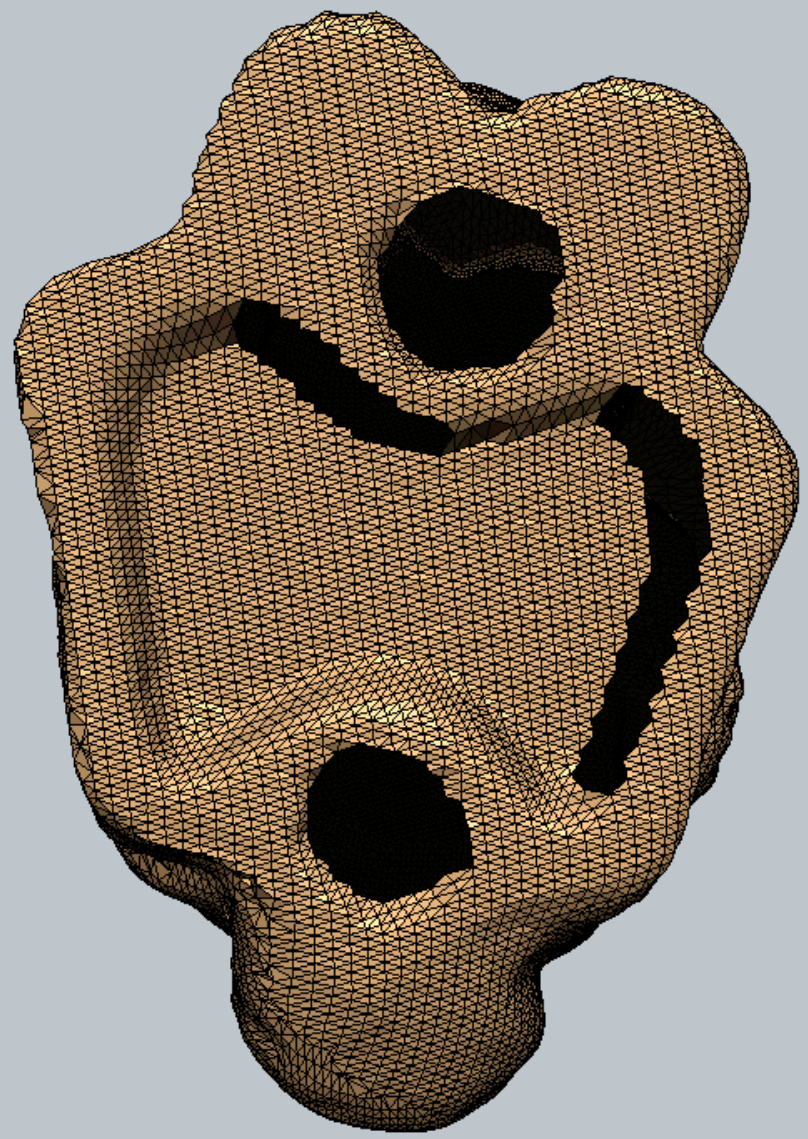

Irregular Meshes

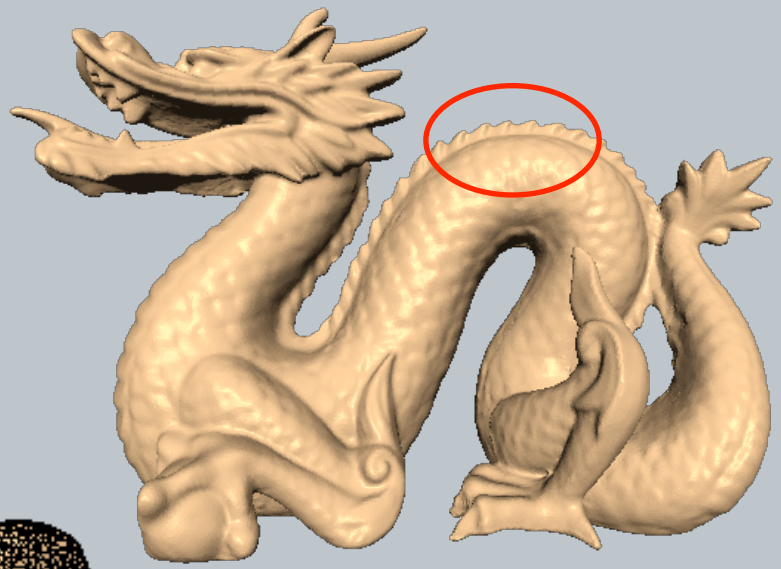

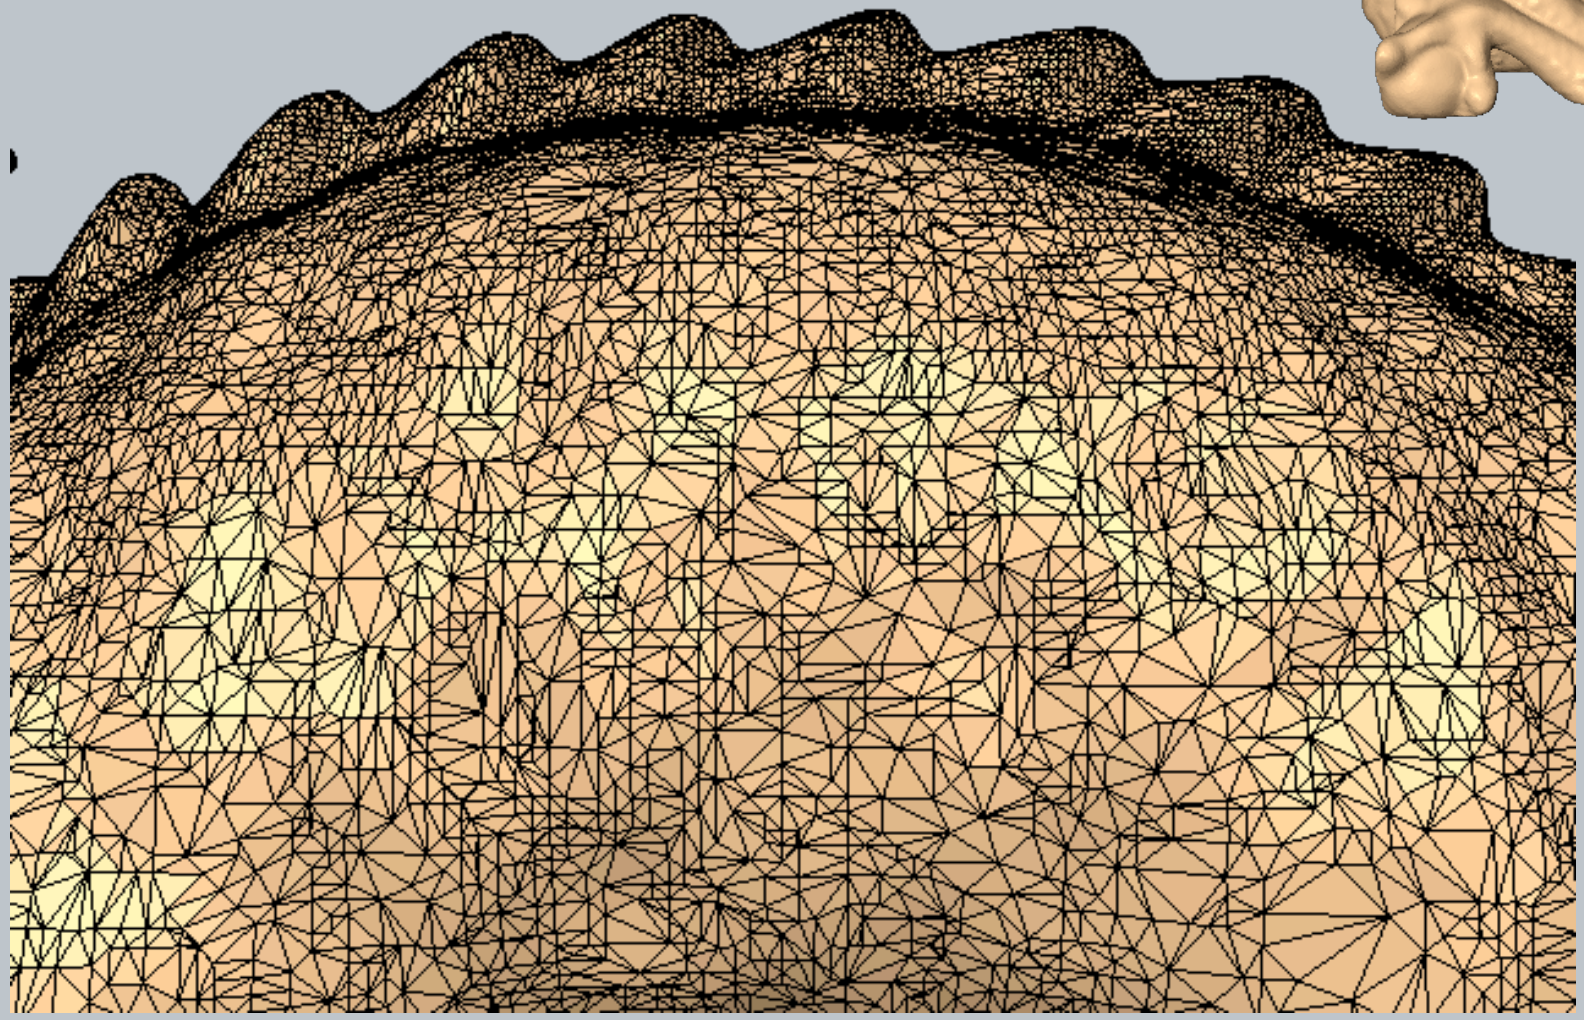

Massive Meshes

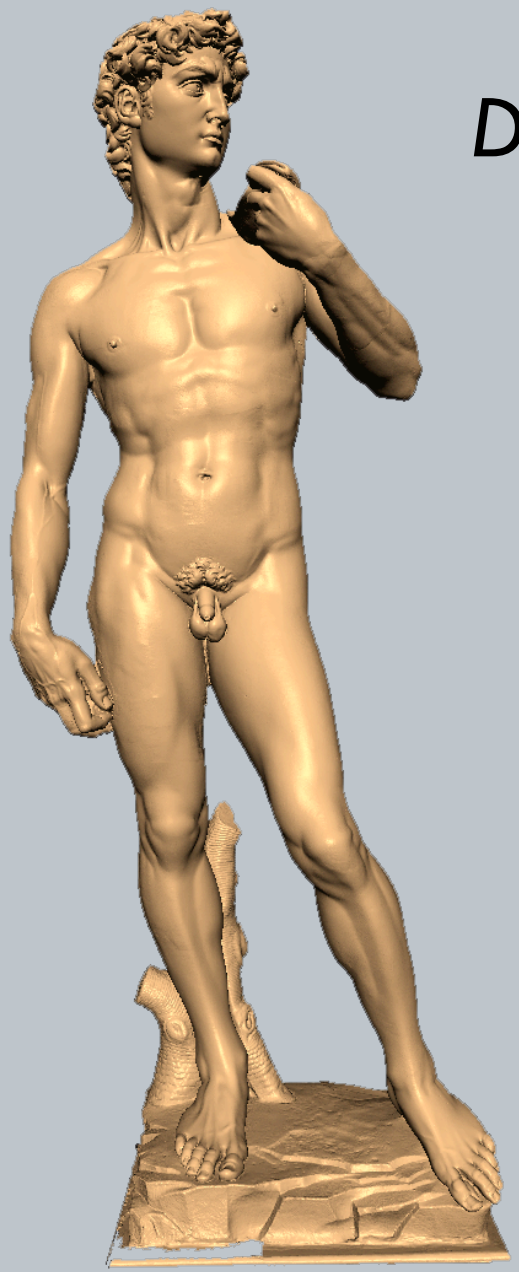

David

57 million triangles
1.4 Gigabytes
1 mm resolution

St. Matthew

300 million triangles
6.5 Gigabytes
¼ mm resolution

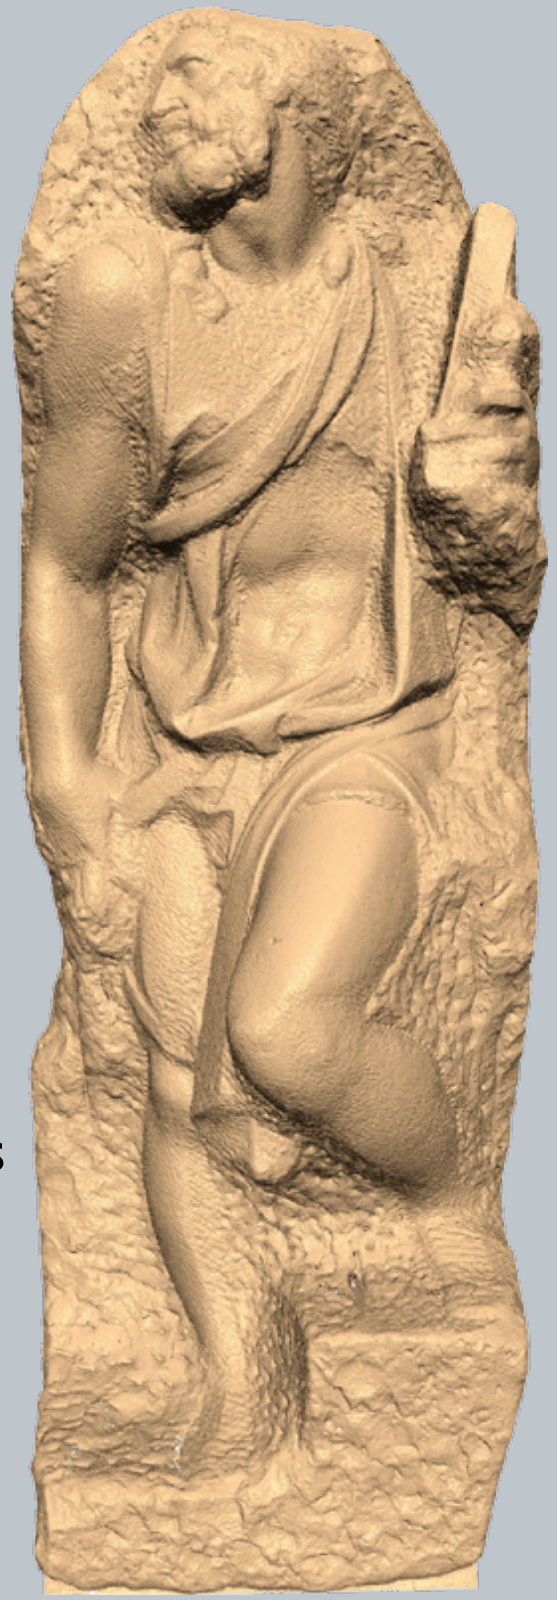

Historical Aside: What is Big?

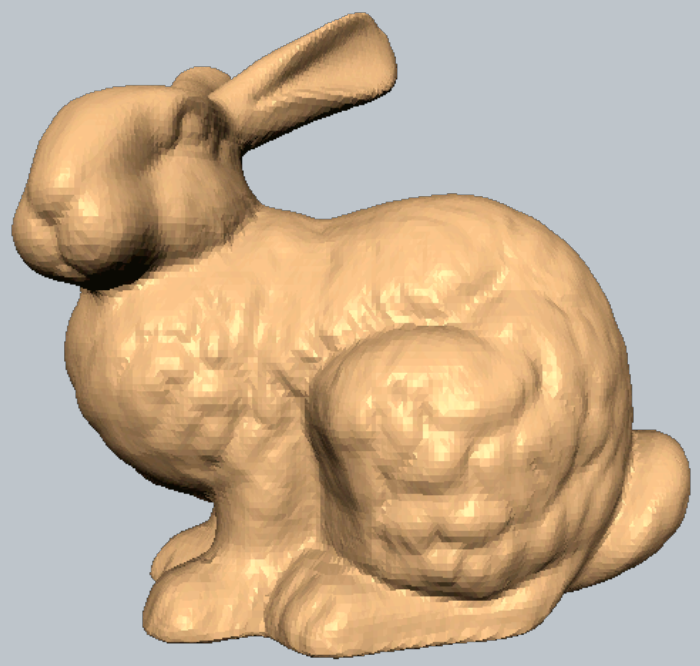

1995
70,000 triangles

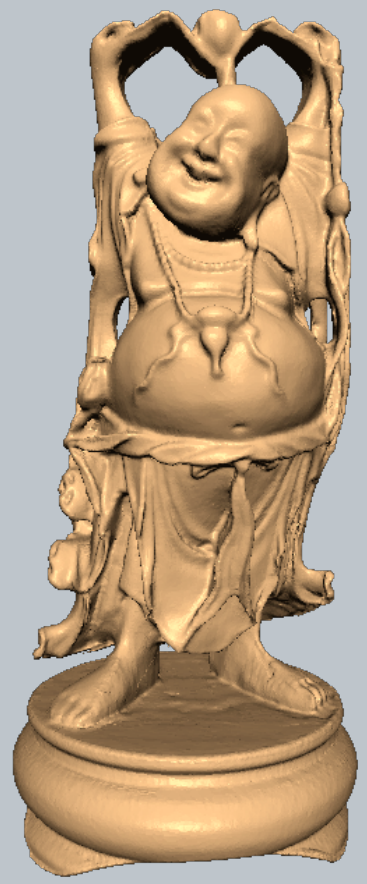

1997
1 million triangles

2000
300 million triangles

Bad Topology

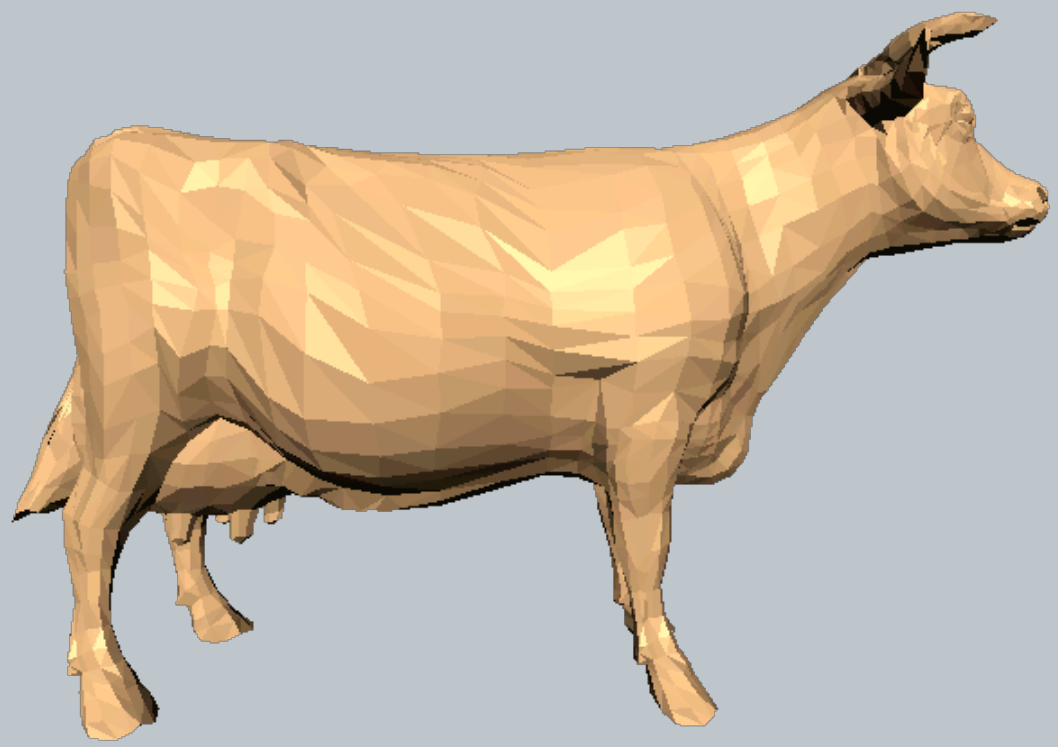

Not *quite* manifold

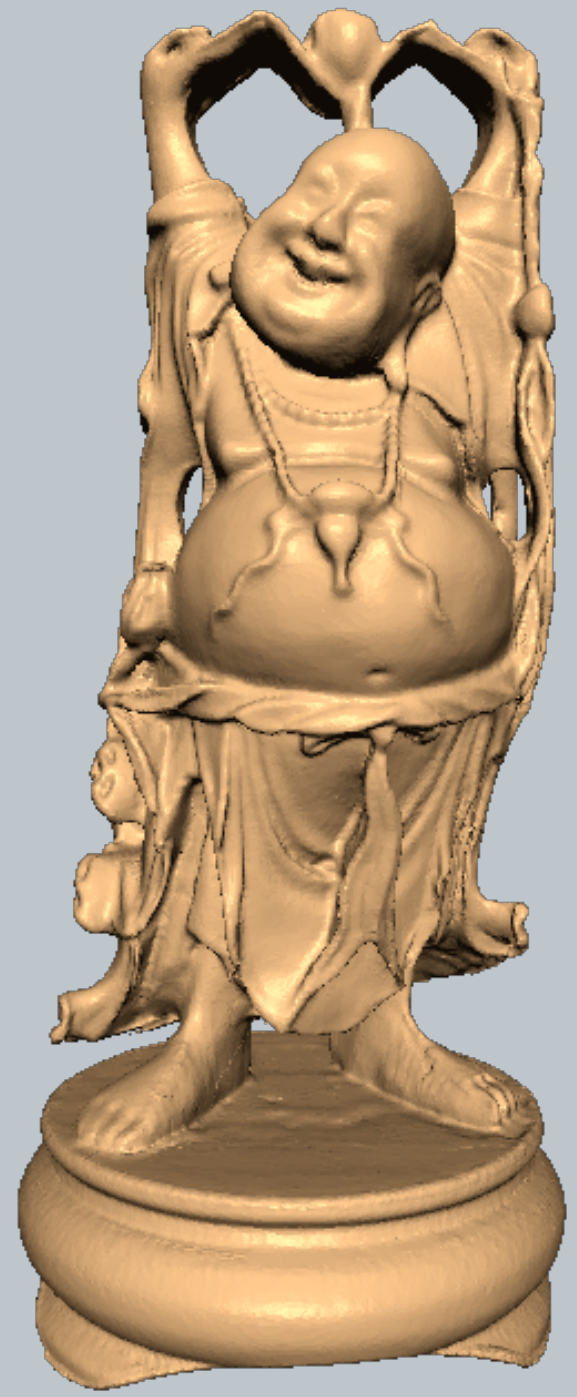

Artificially high genus

Noise & Grid Artifacts

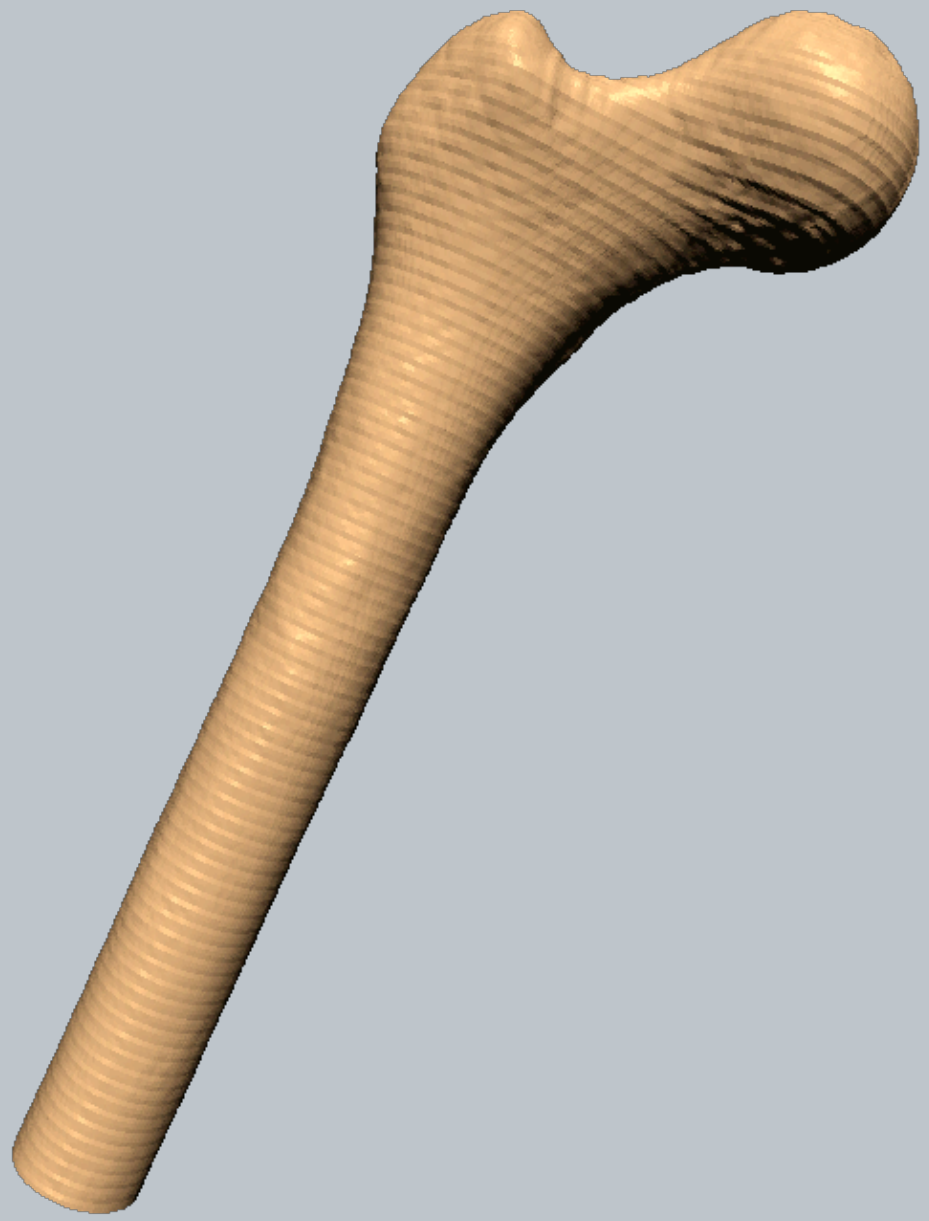

What do we want?

- Only as many triangles as really necessary

- Tessellation that adapts to geometry

Curvature adaptation

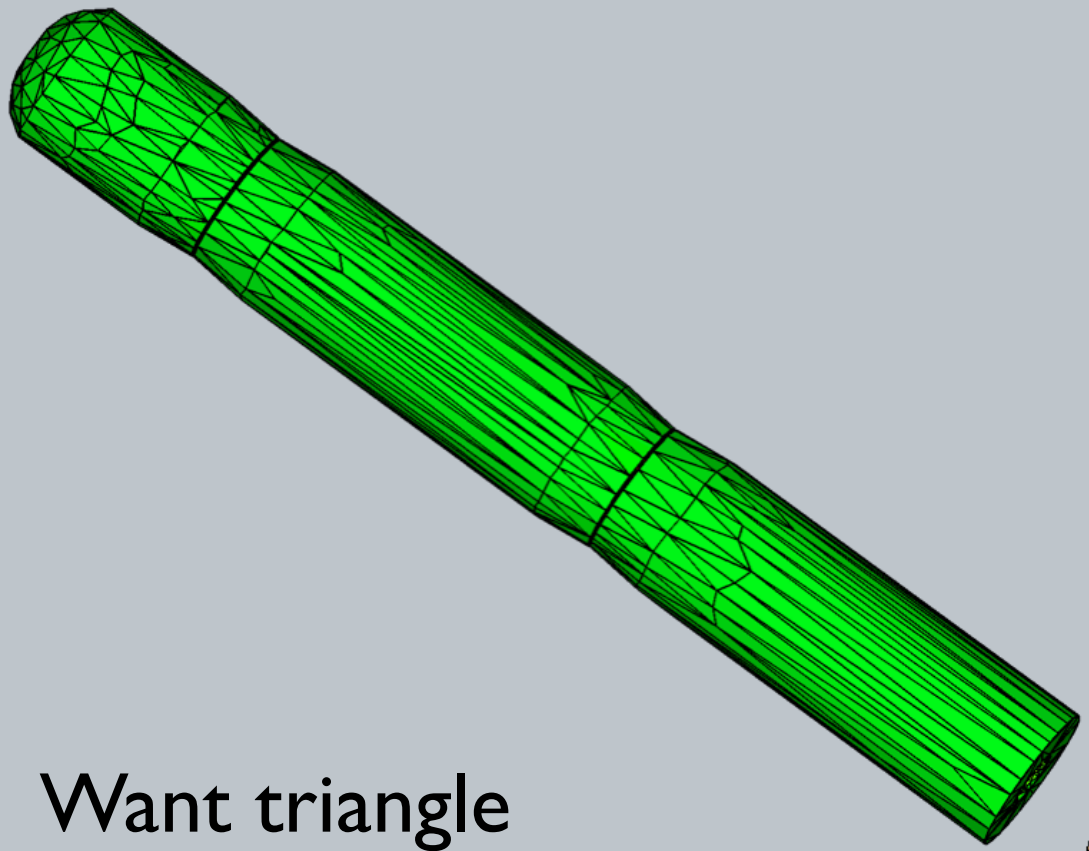

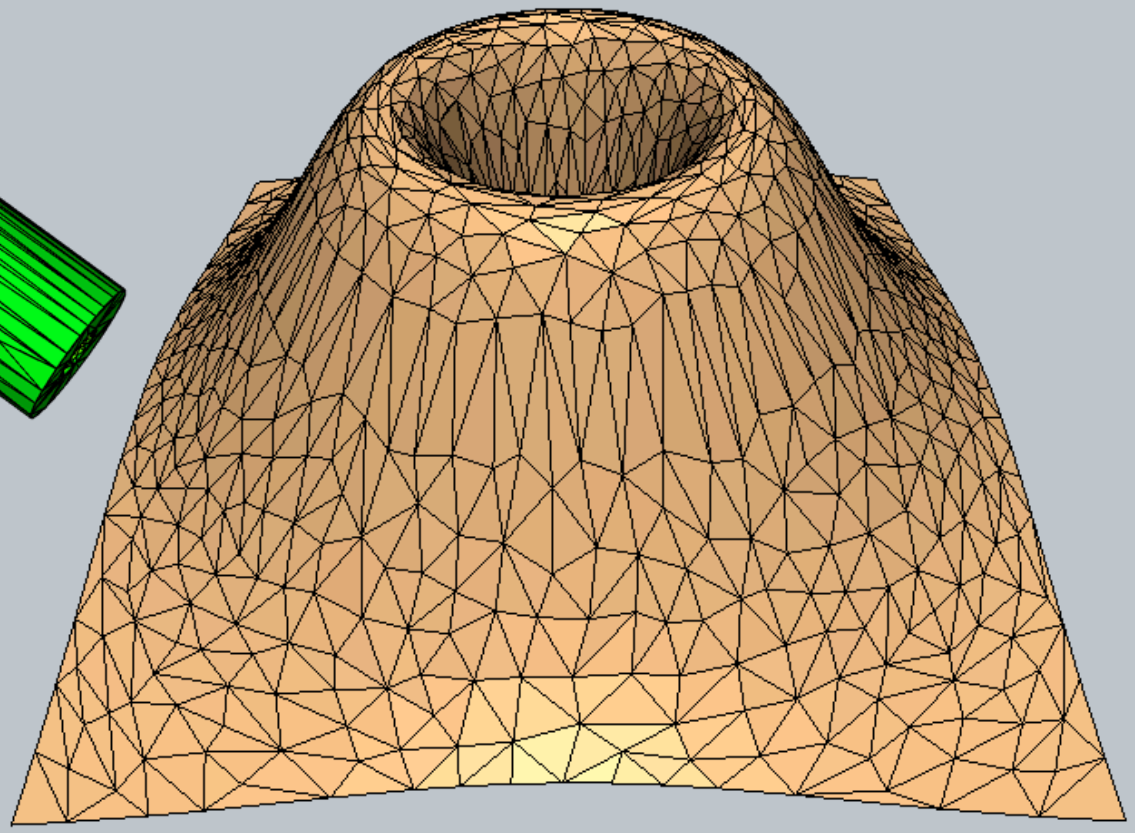

Want triangle aspect ratio of:

$$\rho = \sqrt{\left|\frac{\kappa_2}{\kappa_1}\right|}$$

Hierarchical Surfaces

172,974 vertices

20,000 vertices

5000 vertices

Out-of-core Processing

- 6.5 GB of raw data
- Impractical to load into RAM

Surface Simplification

Simplification Framework

Greedy iterative contraction

1. rank all edges by cost metric
2. contract minimum cost edge
3. update edge costs

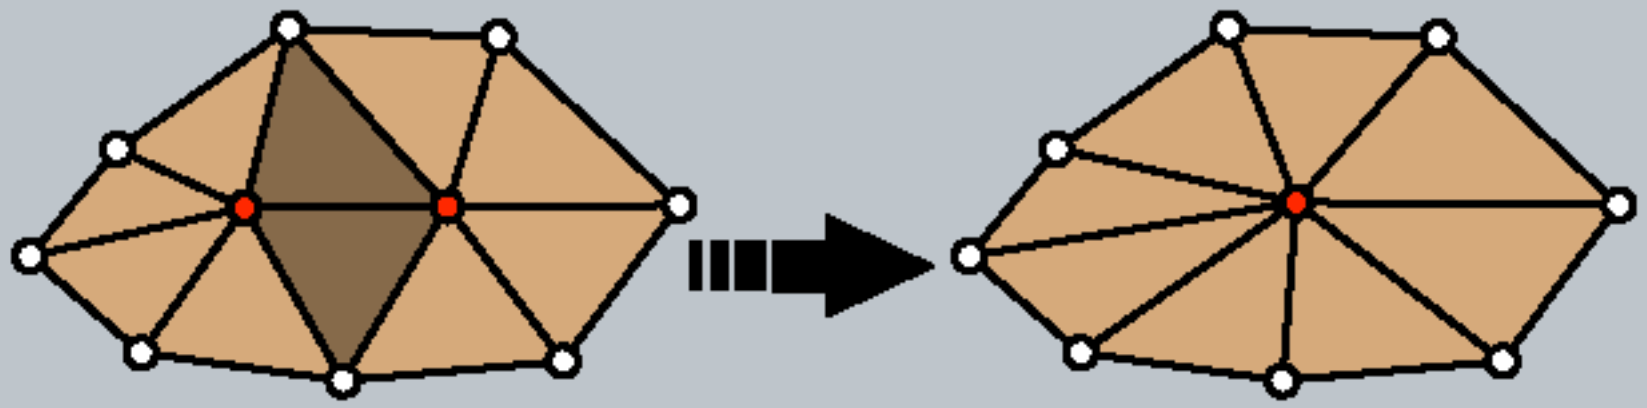

How to measure Cost?

- Want to allow points to move over surface
  - measure deviation from surface
  - this is expensive
- An approximation would require points to remain close to the local tangent planes

Quadric Error Metric

Given a tangent plane, we can define a *quadric*

$$Q = (\mathbf{A}, \mathbf{b}, c) = (\mathbf{n}\mathbf{n}^T, -\mathbf{A}\mathbf{p}, \mathbf{p}^T\mathbf{A}\mathbf{p})$$

Measuring the squared distance of point to the plane

$$Q(\mathbf{x}) = \mathbf{x}^T\mathbf{A}\mathbf{x} + 2\mathbf{b}^T\mathbf{x} + c$$

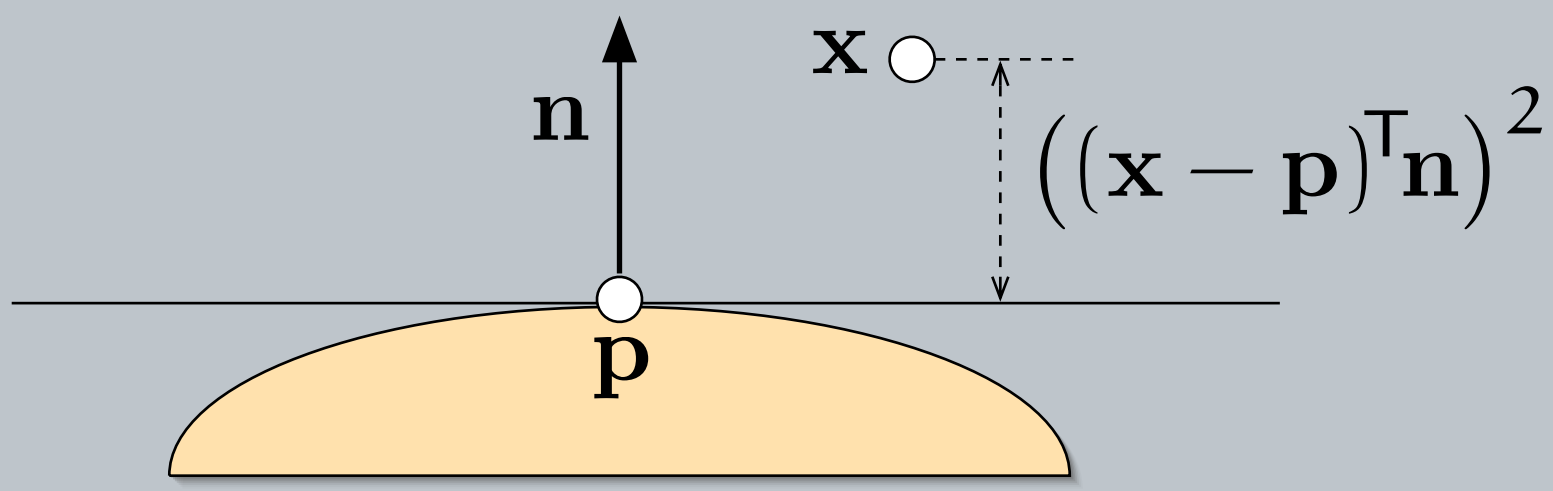

Quadric Error Metric

Sum of quadrics represents a set of planes

$$\sum_i \left((\mathbf{x} - \mathbf{p}_i)^T \mathbf{n}_i \right)^2 = \sum_i Q_i(\mathbf{x}) = \left(\sum_i Q_i \right) (\mathbf{x})$$

Any set of vertices has an associated quadric

- sum over faces with corner in set
- find representative minimizing error

$$\nabla Q(\mathbf{x}^\star) = 0 \qquad \mathbf{A}\mathbf{x}^\star = -\mathbf{b}$$

Algorithm Overview

- *Initialization*
  - Compute quadric for each vertex from planes of surrounding faces
- *Iterative Contraction*
  - Repeatedly contract the edge of least cost
  - Add quadrics when contracting edges

Sample Results

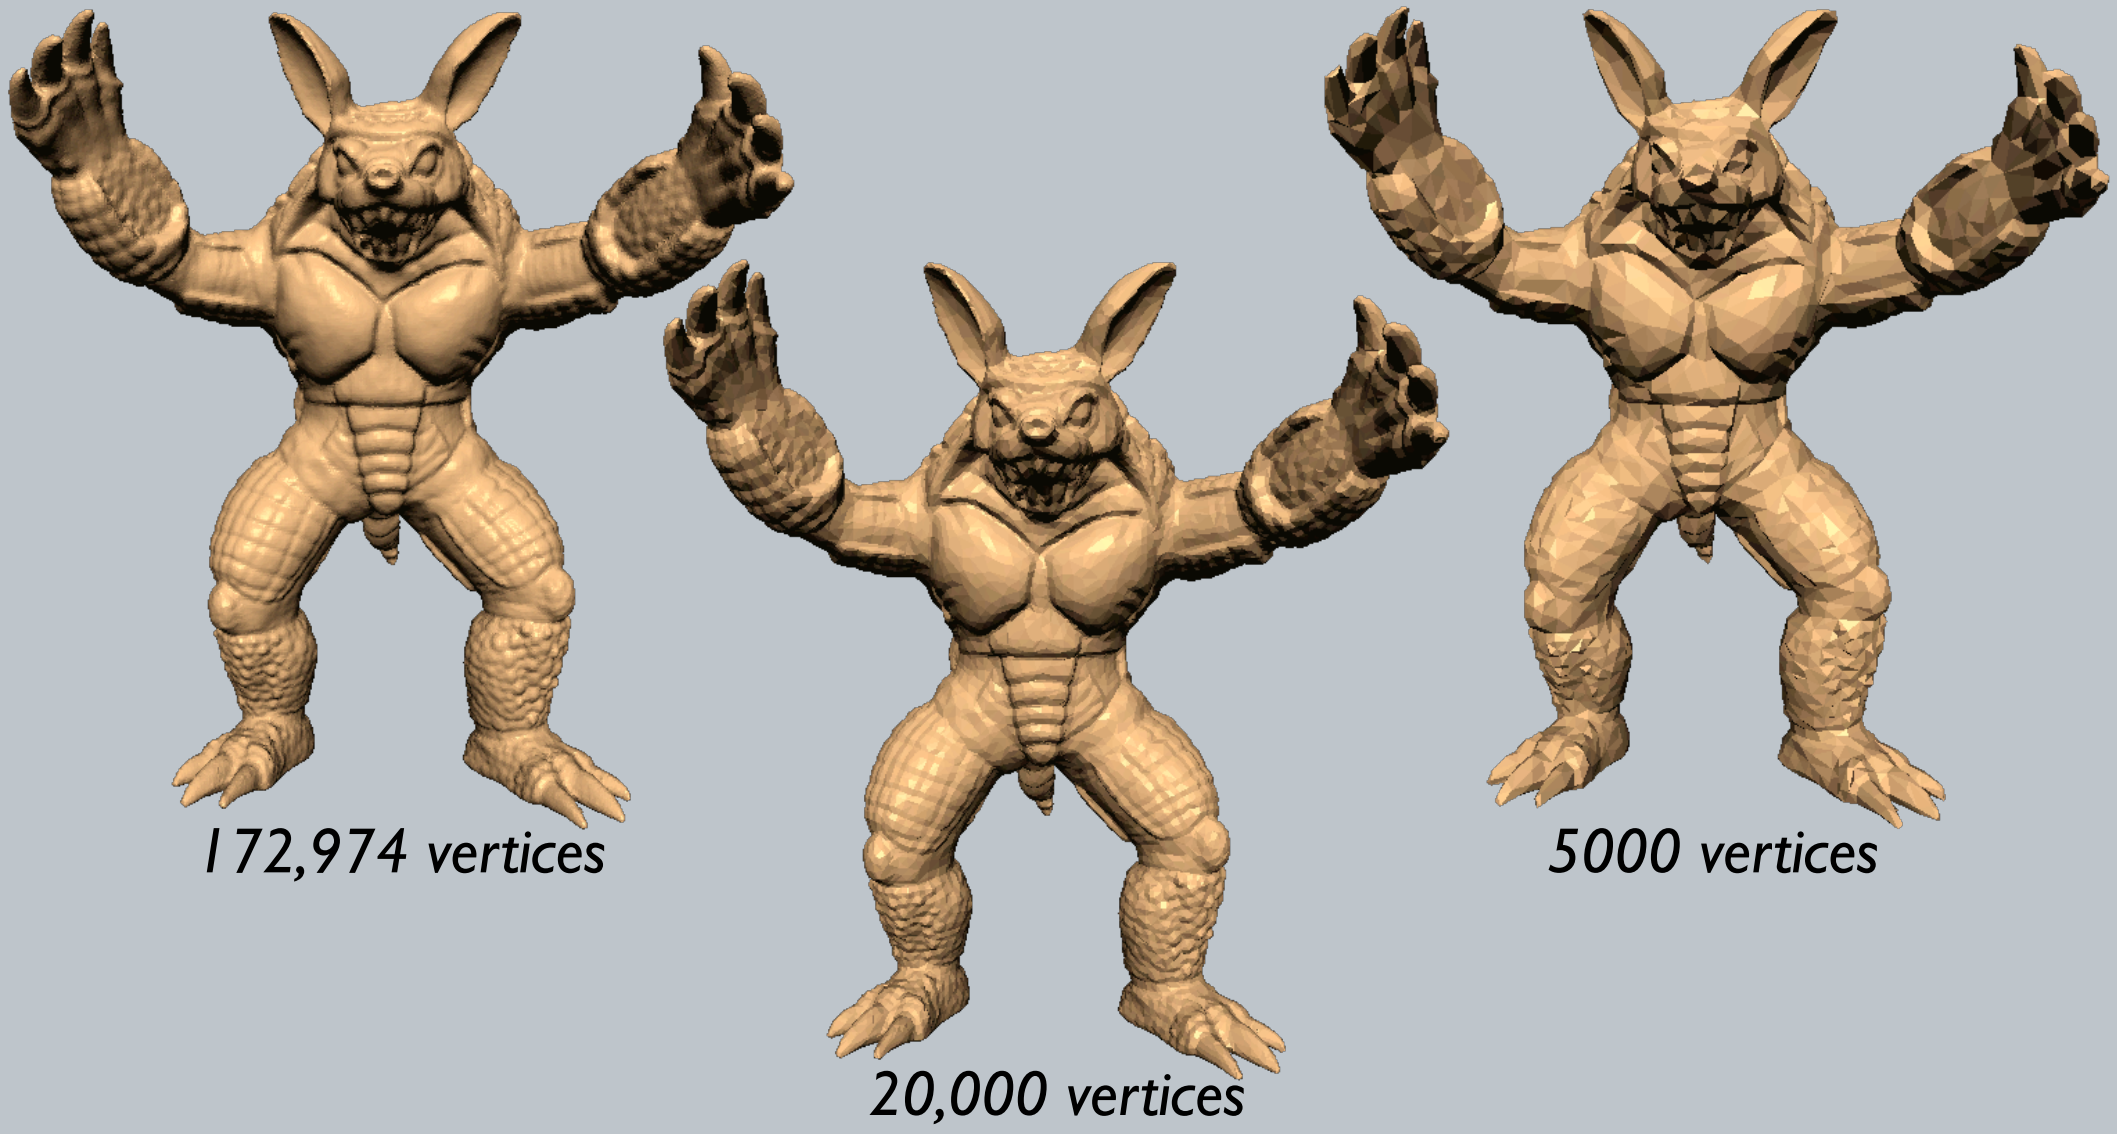

Less than 13 seconds on 1GHz Pentium III

Demo

Generalized Simplification

Beyond Triangulated Surfaces

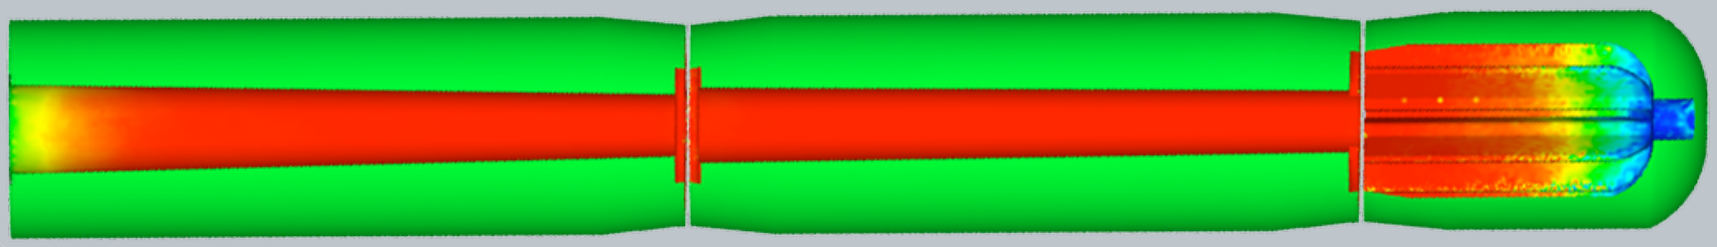

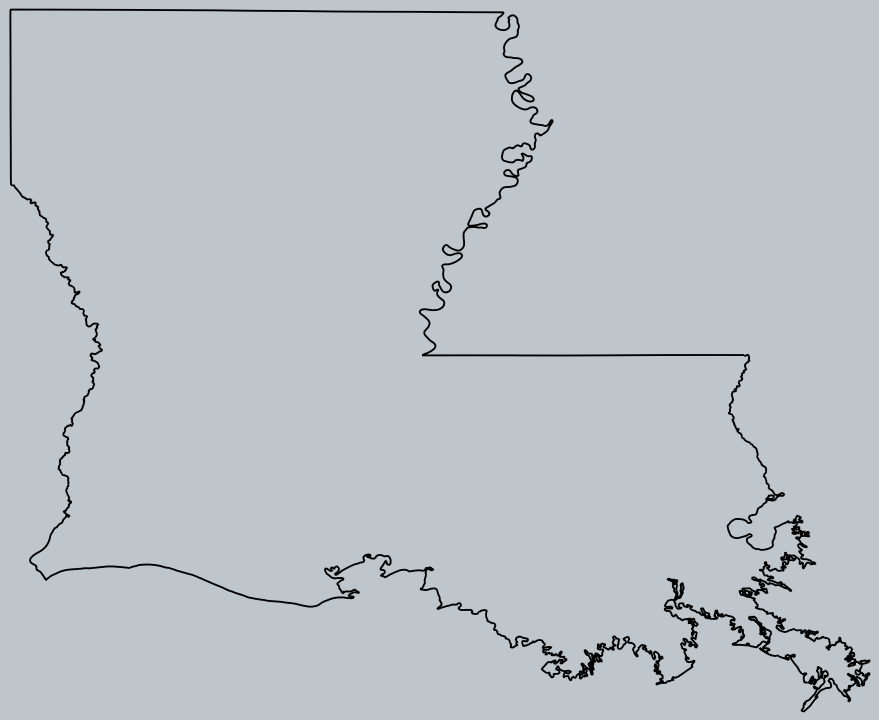

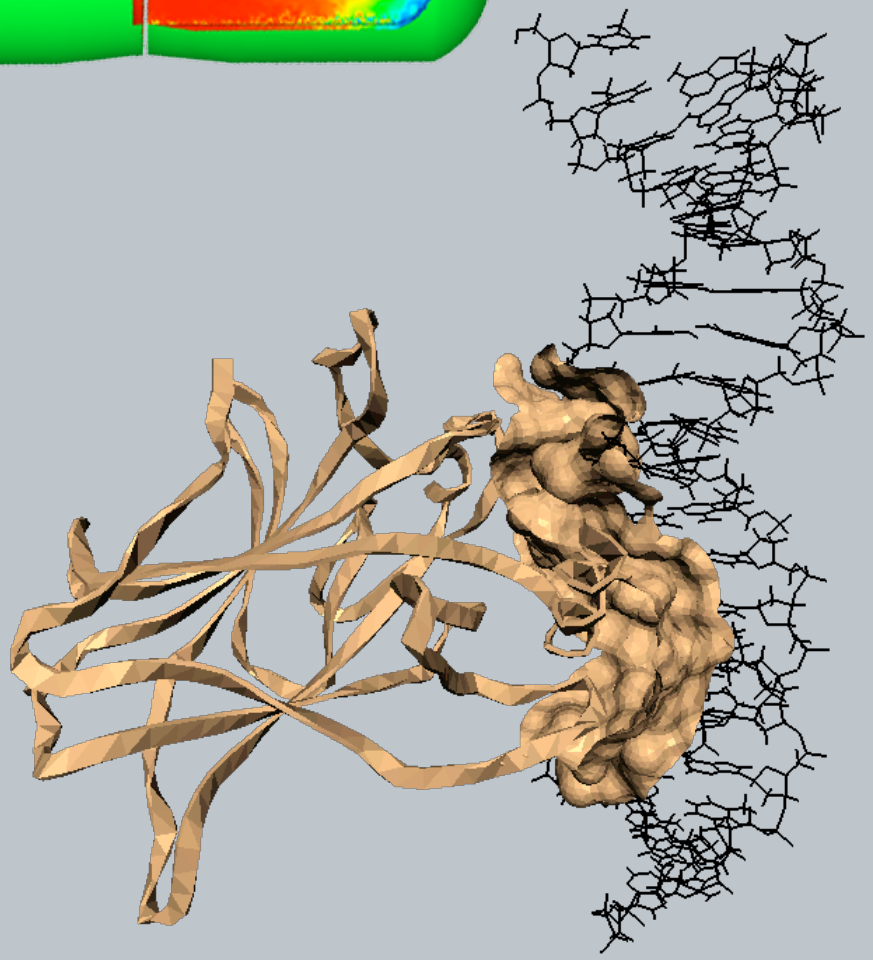

Quadric Error Metric

Any *d*-simplex has a tangent space of dimension *d* with orthonormal tangent vectors $\mathbf{e}_1, \ldots, \mathbf{e}_d$

Squared distance of a point to this tangent space:

$$(\mathbf{x} - \mathbf{p})^\mathsf{T} \left(\mathbf{I} - \sum_{i=1}^{d} \mathbf{e}_i \mathbf{e}_i^\mathsf{T} \right) (\mathbf{x} - \mathbf{p})$$

Quadric Error Metric

Squared distance of a point to this tangent space:

$$Q(\mathbf{x}) = \mathbf{x}^T\mathbf{A}\mathbf{x} + 2\mathbf{b}^T\mathbf{x} + c$$

where

$$\mathbf{A} = \mathbf{I} - \sum_{i=1}^{d} \mathbf{e}_i\mathbf{e}_i^T \qquad \mathbf{b} = -\mathbf{A}\mathbf{b} \qquad c = \mathbf{p}^T\mathbf{A}\mathbf{p}$$

True of any *d*-simplex in any Euclidean *n*-space

Plane Curves

6817

1000

500

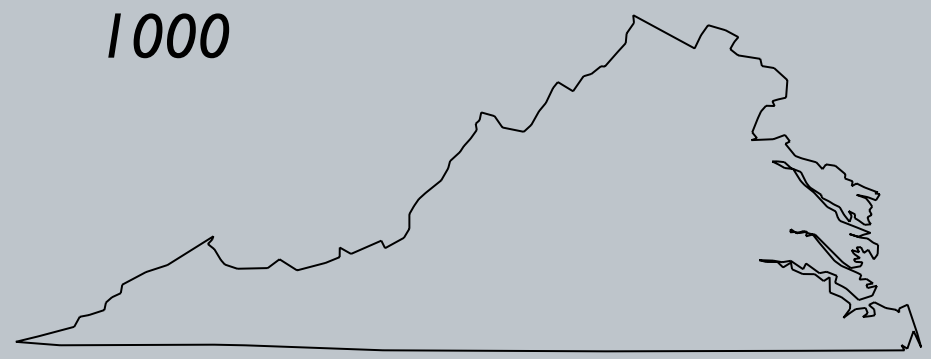

250

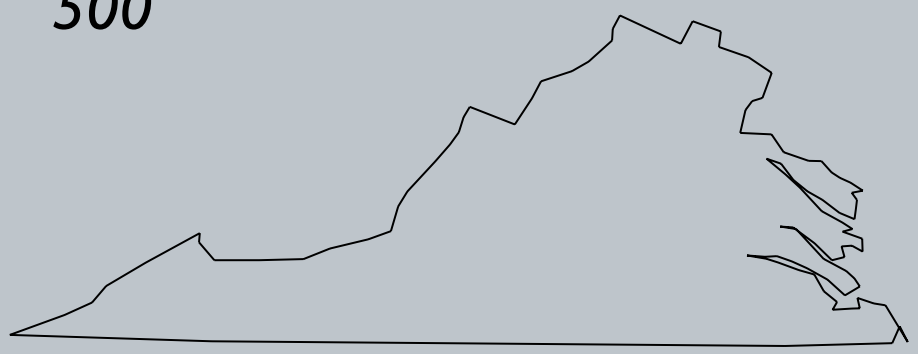

100

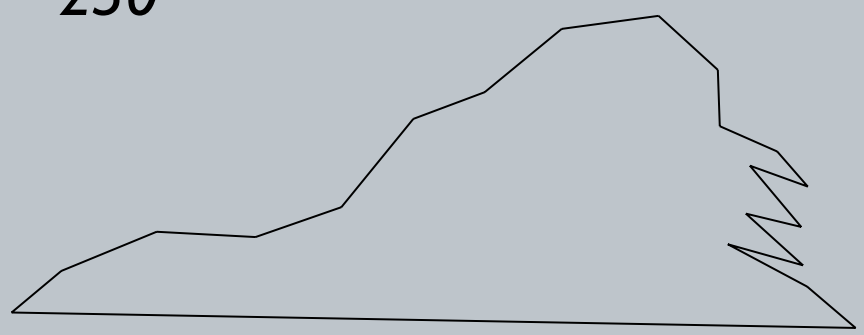

20

Non-manifold Plane Curve with Boundary

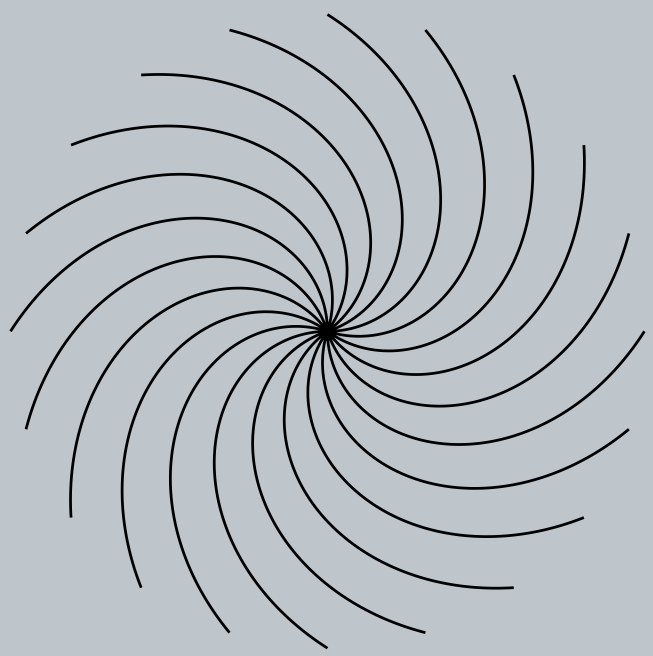

20,001
vertices

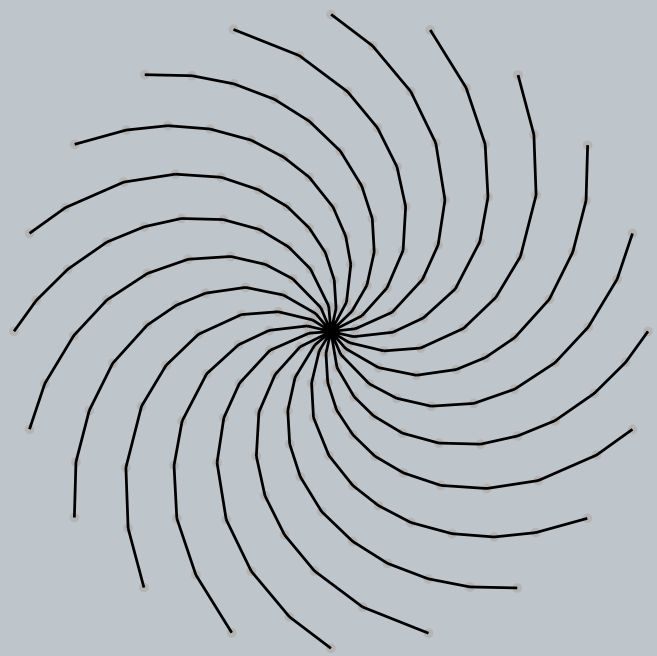

201
vertices

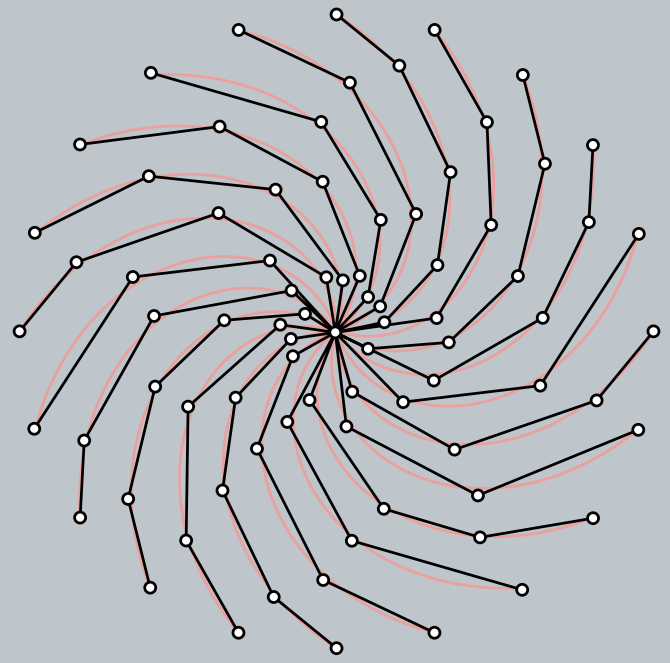

81
vertices

Space Curves

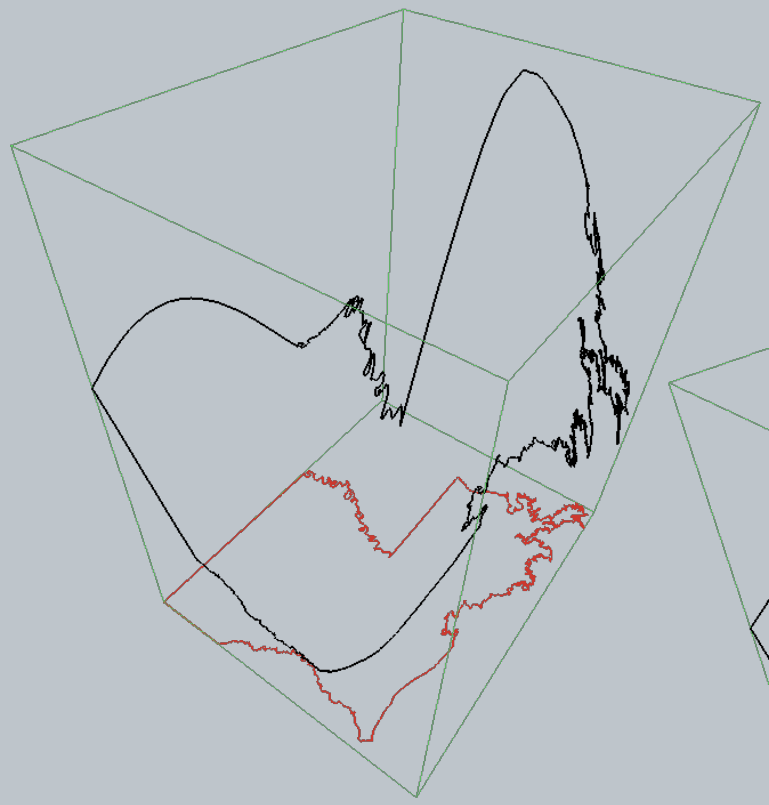

Original
8234 vertices

250 vertices

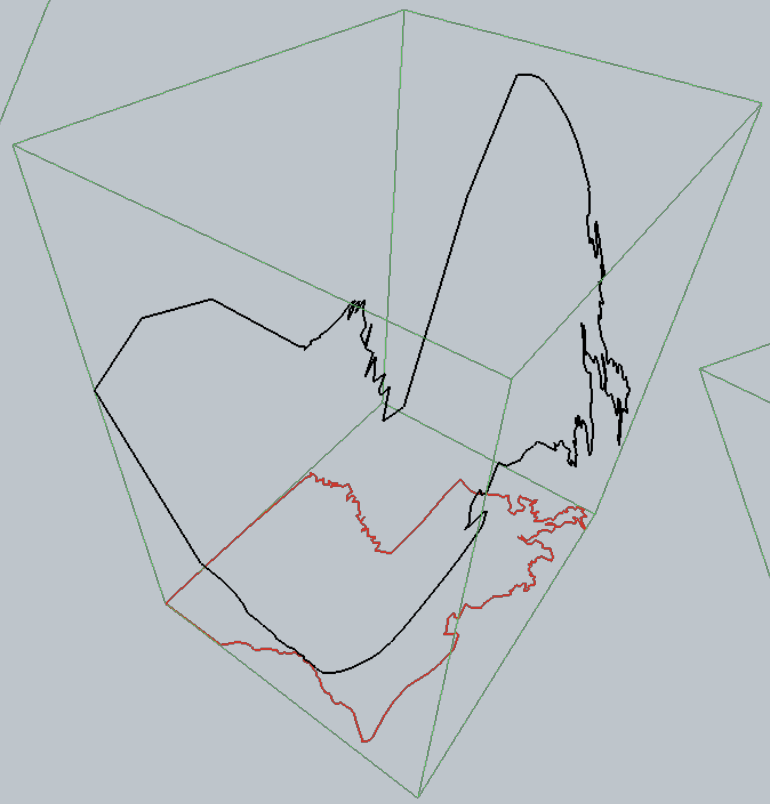

50 vertices

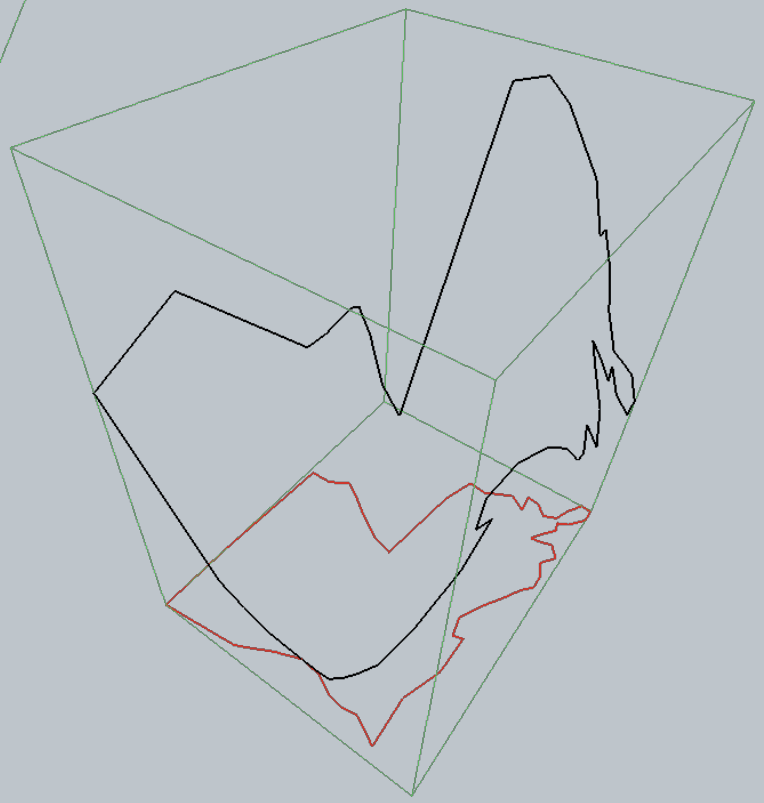

Surfaces with Attributes

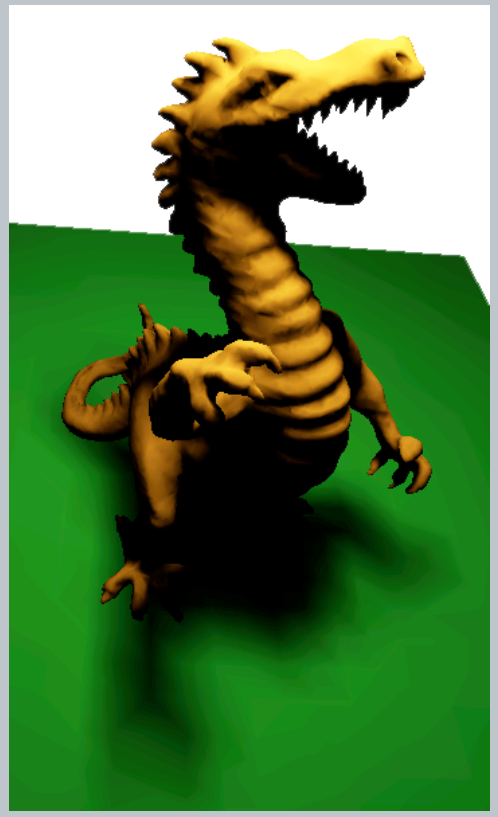

50,000

10,000

3000

1500

Blunt Fin CFD Data

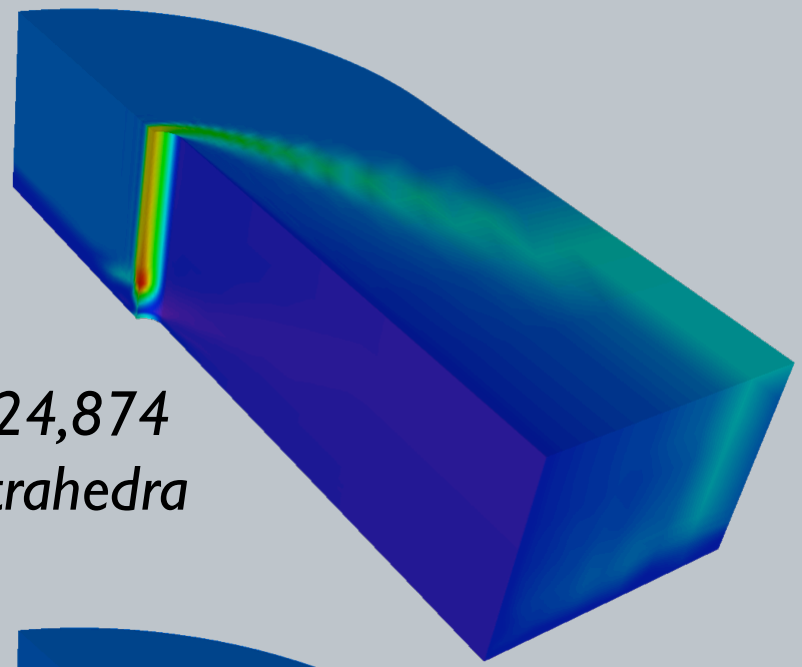

224,874 tetrahedra

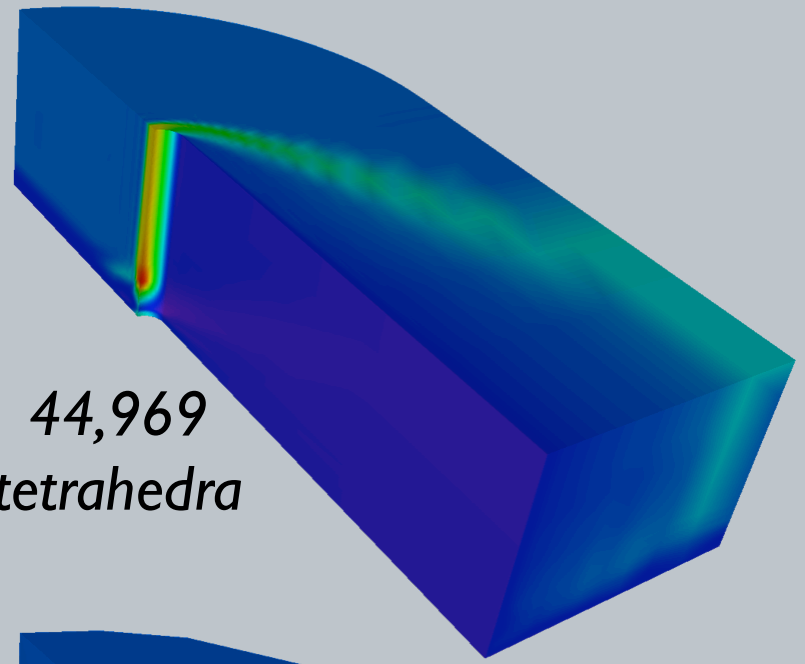

44,969 tetrahedra

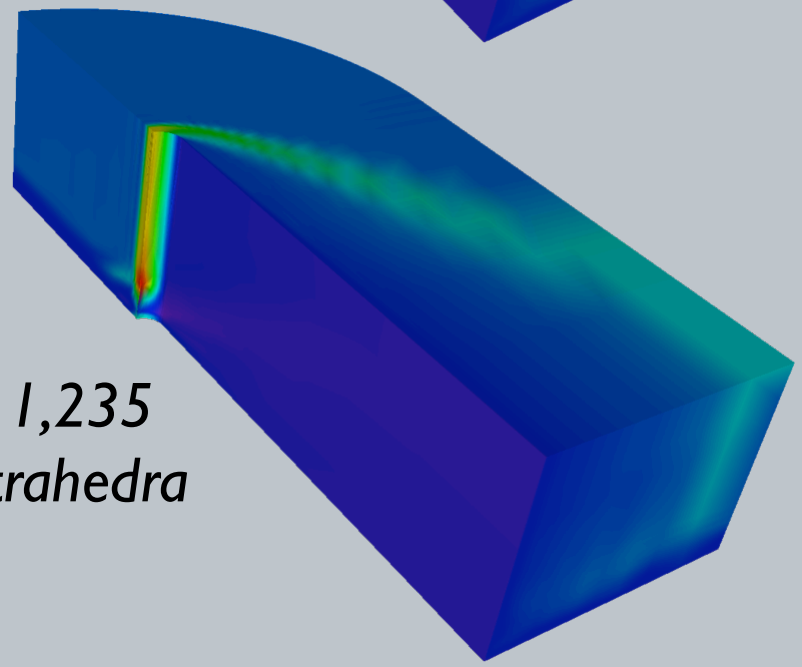

11,235 tetrahedra

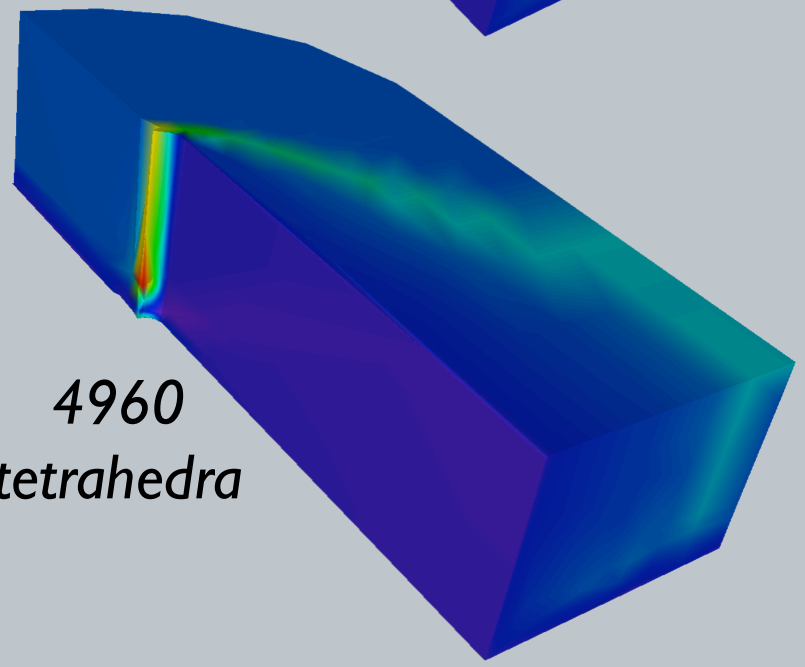

4960 tetrahedra

Blunt Fin CFD Data

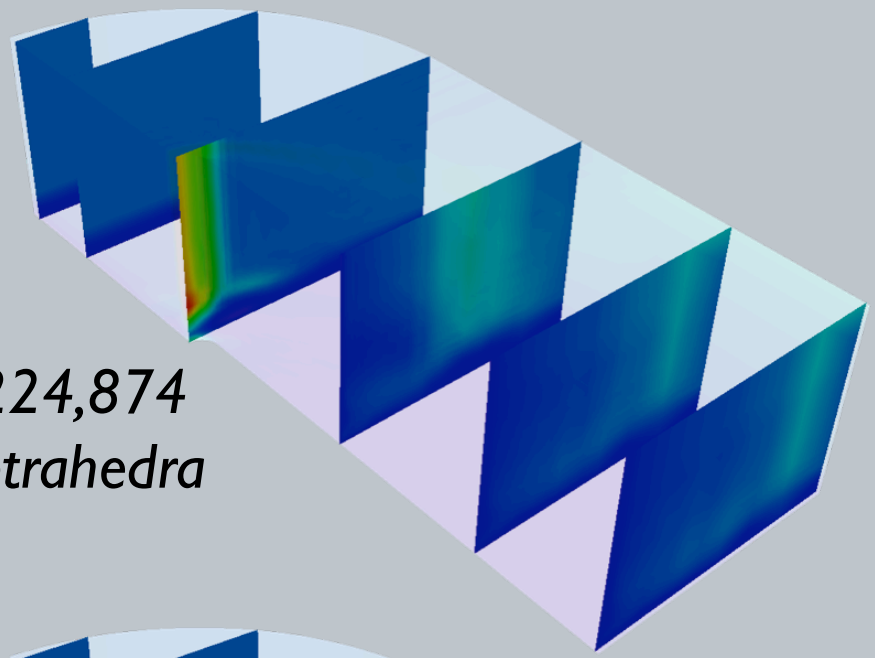

224,874 tetrahedra

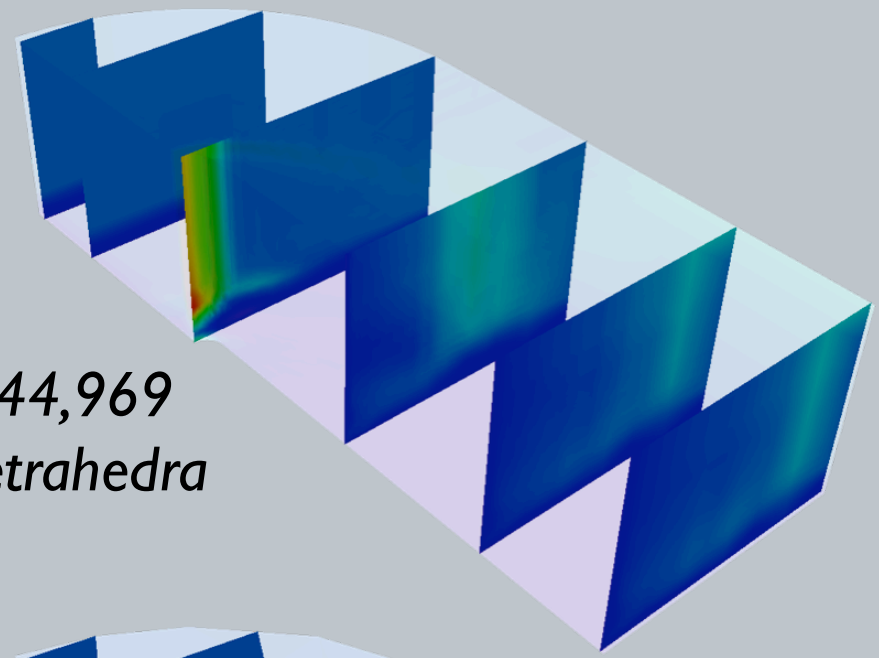

44,969 tetrahedra

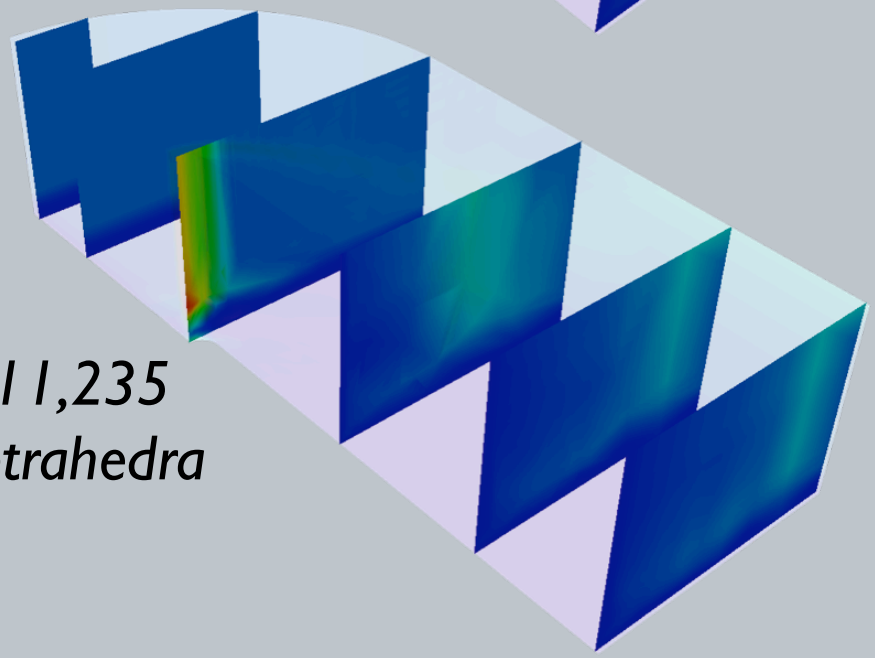

11,235 tetrahedra

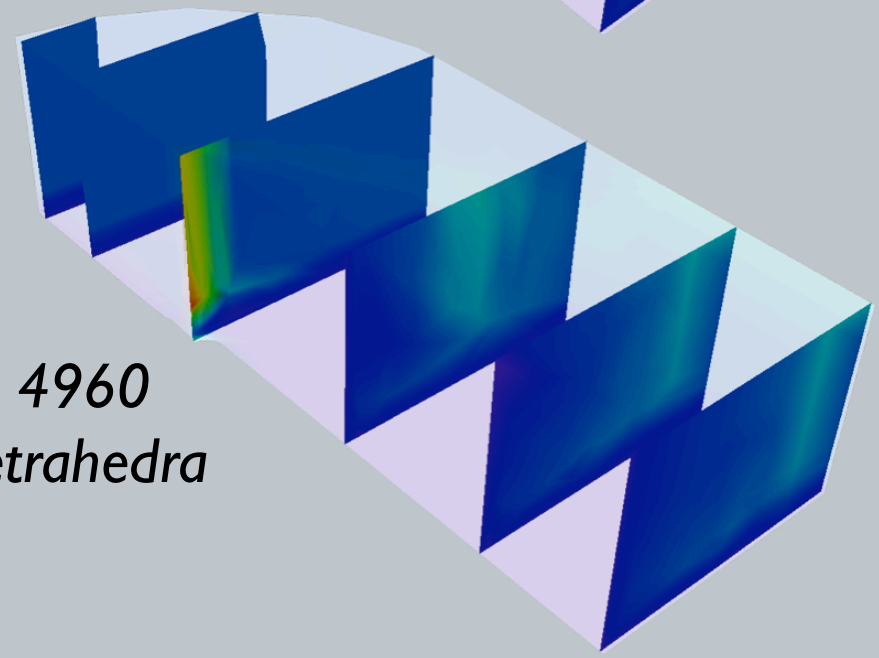

4960 tetrahedra

Liquid Oxygen Post

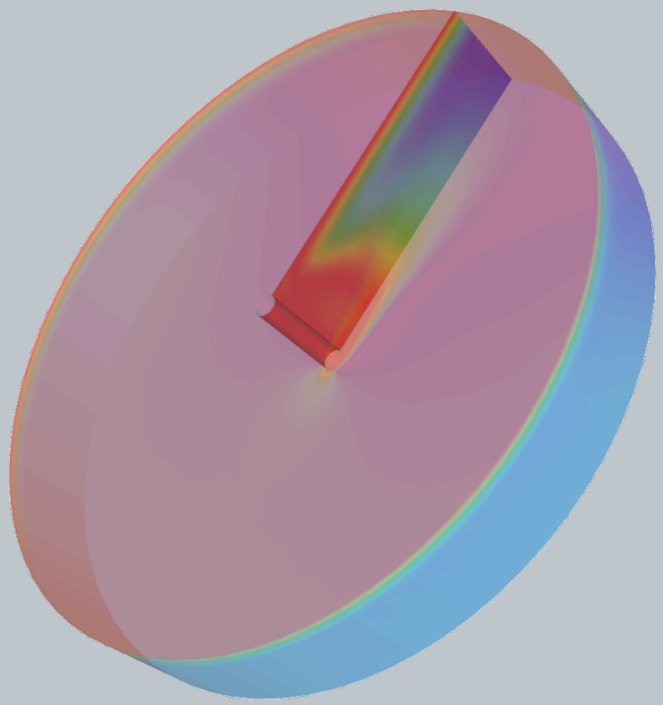

616,050 tetrahedra

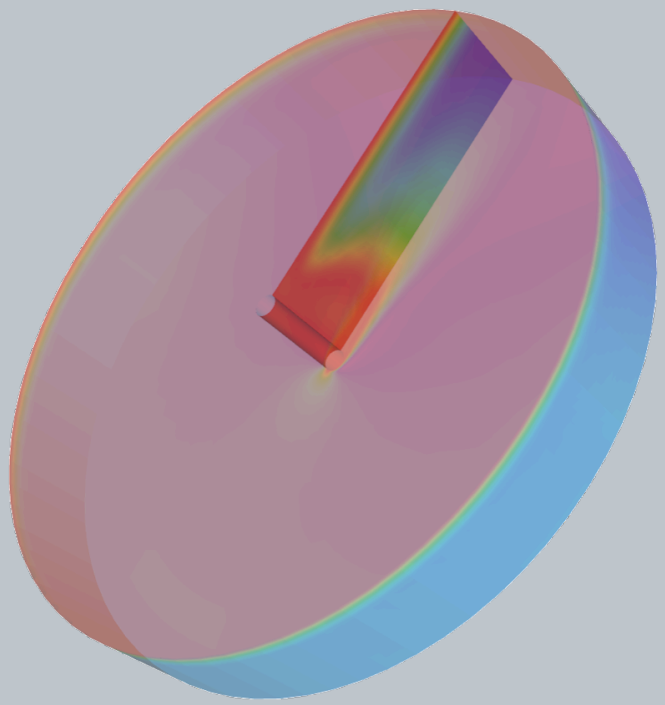

144,000 tetrahedra

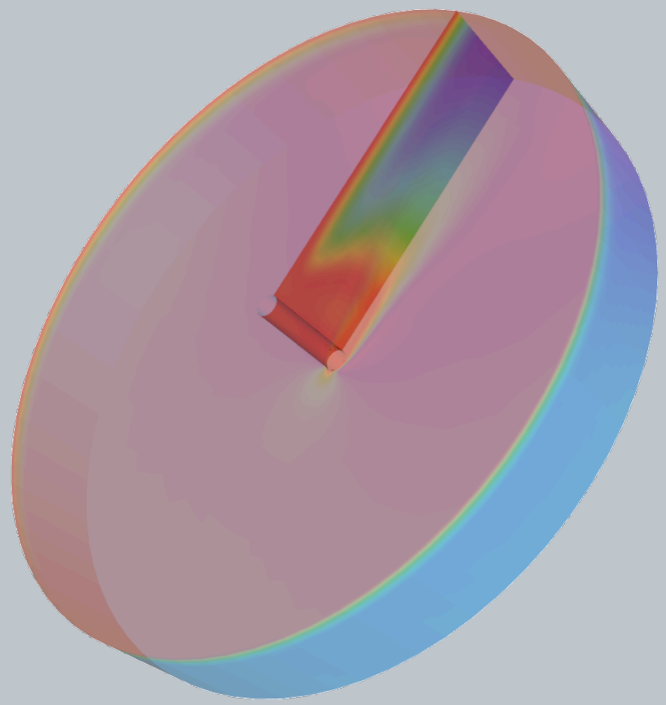

72,000 tetrahedra

Titan IV Rocket

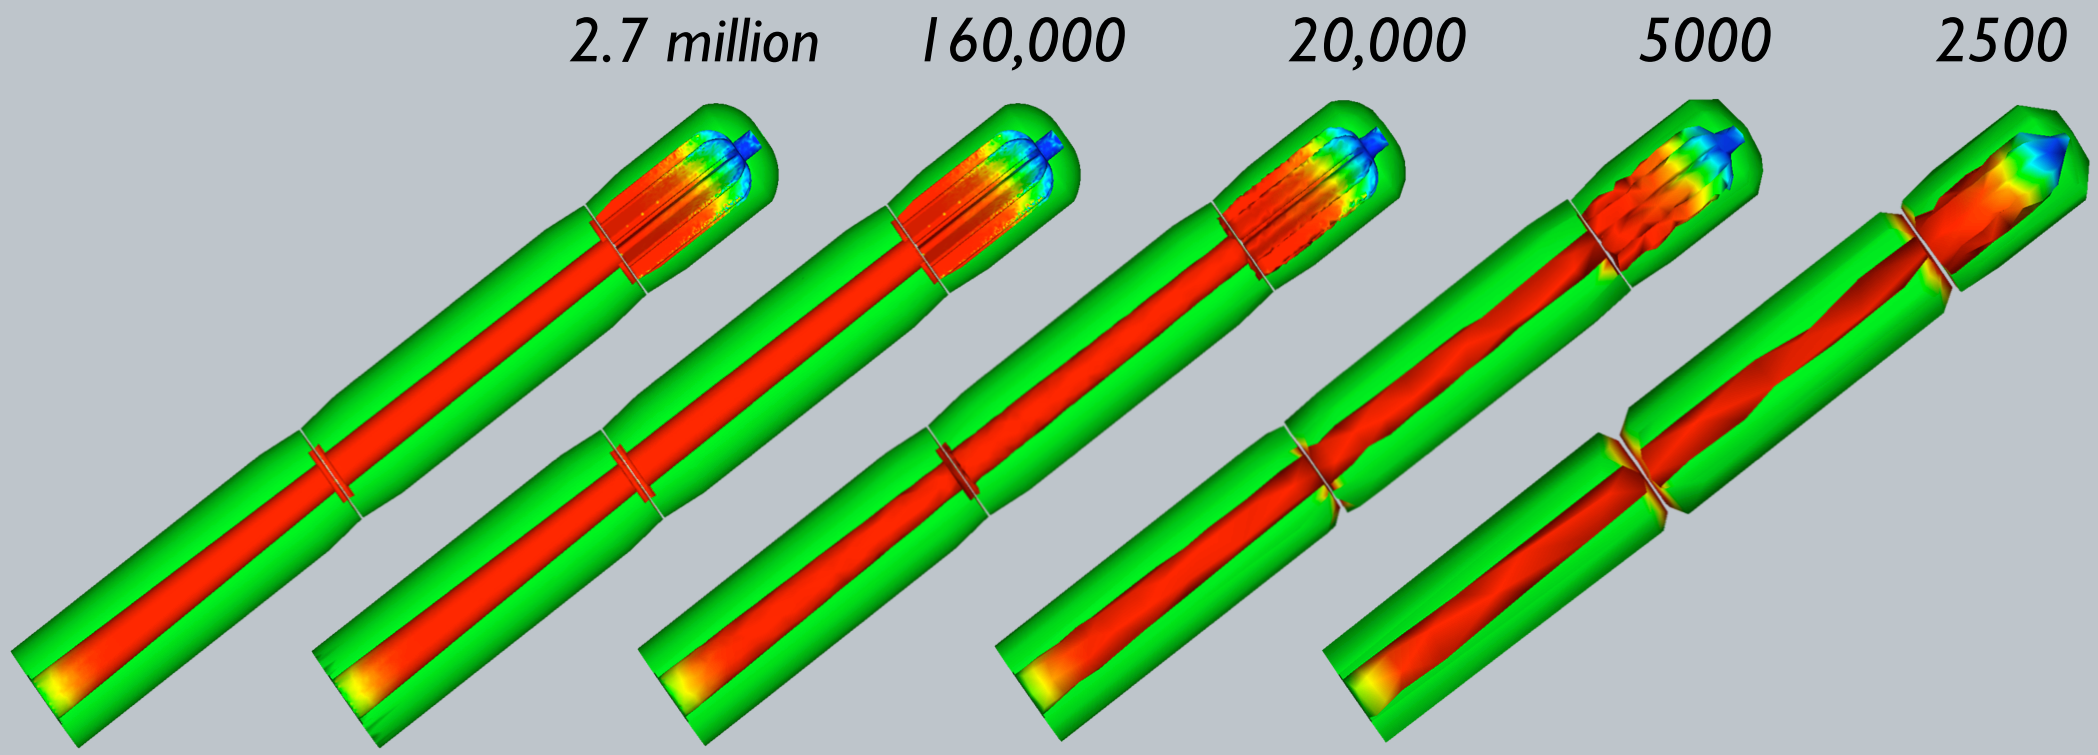

3.5 minutes

Titan IV Boundary

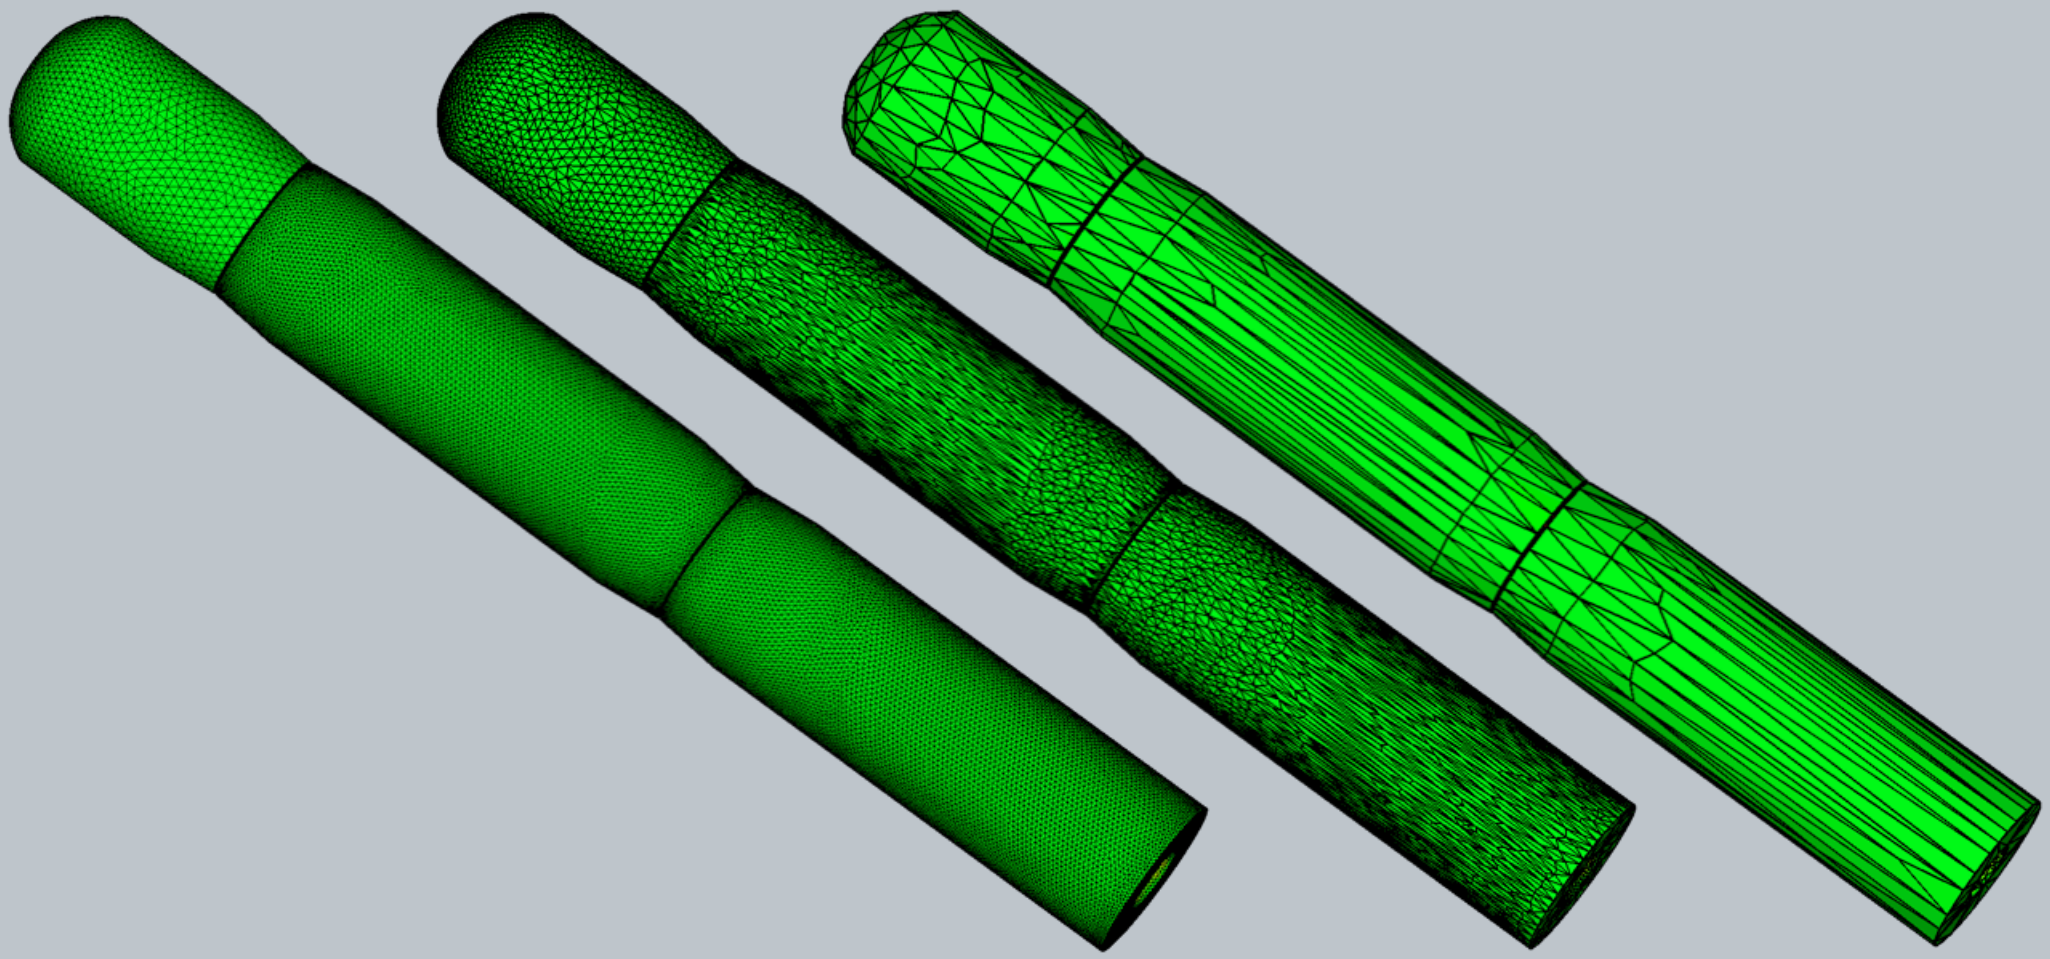

Mixed Complexes

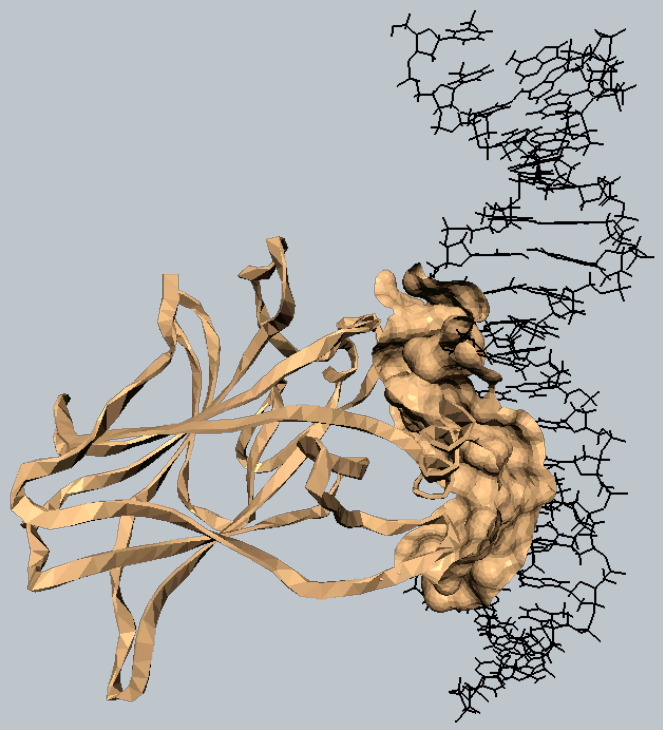

10,710 vertices

5000 vertices

1000 vertices

Massive Meshes

Overall Approach

- Memory usage independent of input size
- Single linear scan of input data

Out-of-Core Clustering

- Single pass spatial clustering
  - partition space into cells
  - merge all vertices within a cell

- Usual suspects for cell decomposition
  - uniform grids, BSP trees, octrees

Grids Go Bad in the End

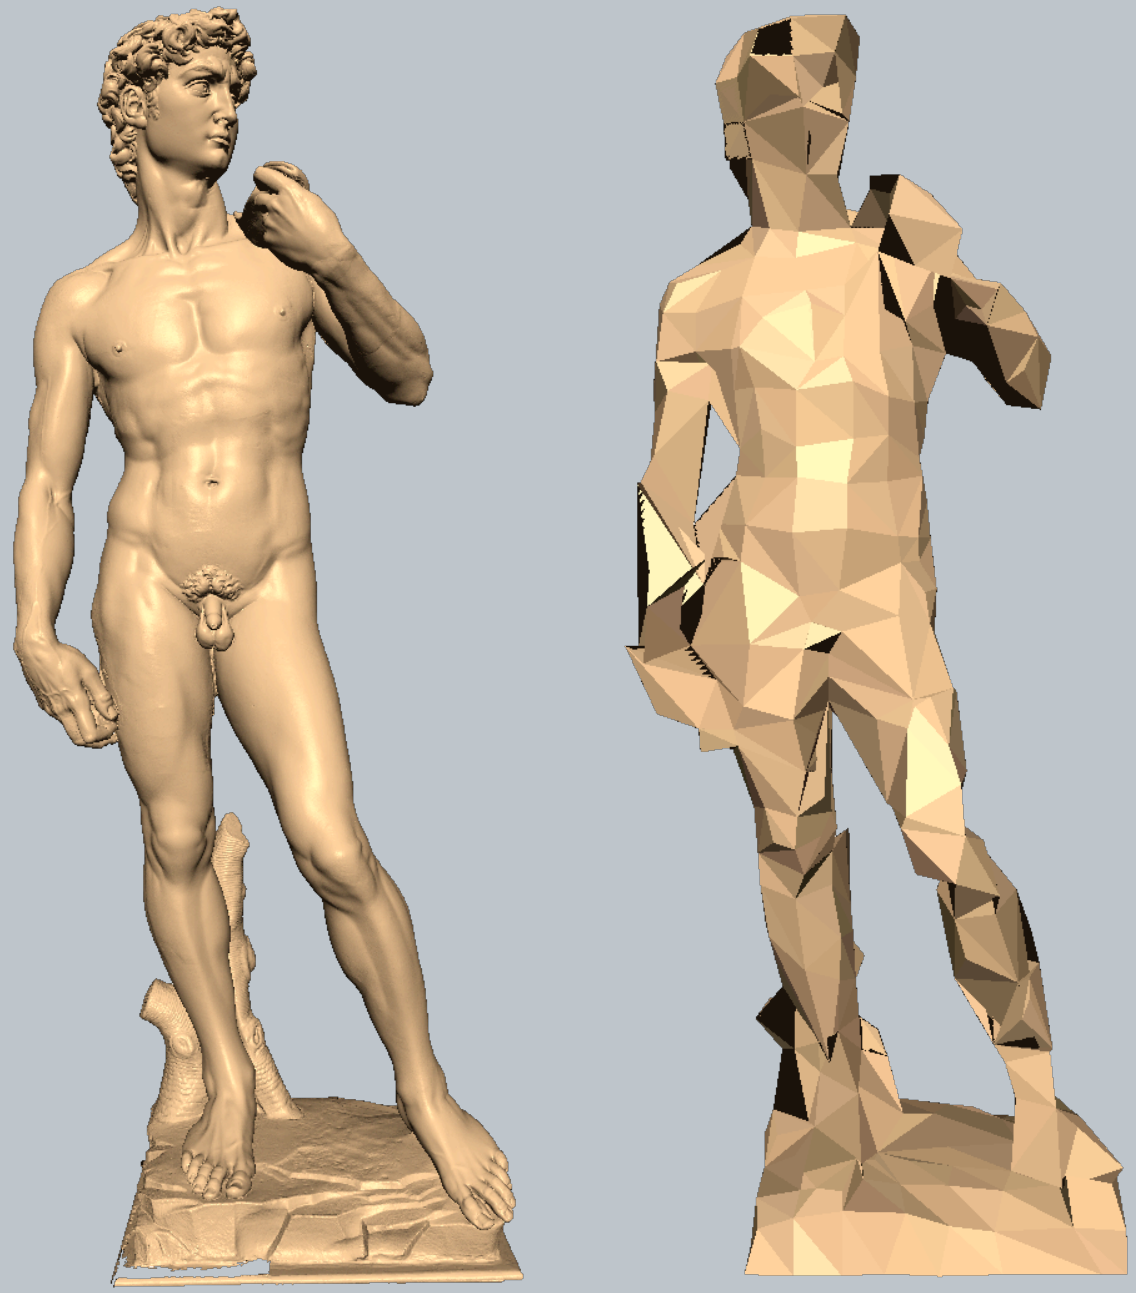

Our Multiphase System

Phase I

- an initial clustering on fine grid
- accumulate quadrics for all faces in grid

Phase II

- iterative contraction
- using quadrics from Phase I

1000 Face Approximation

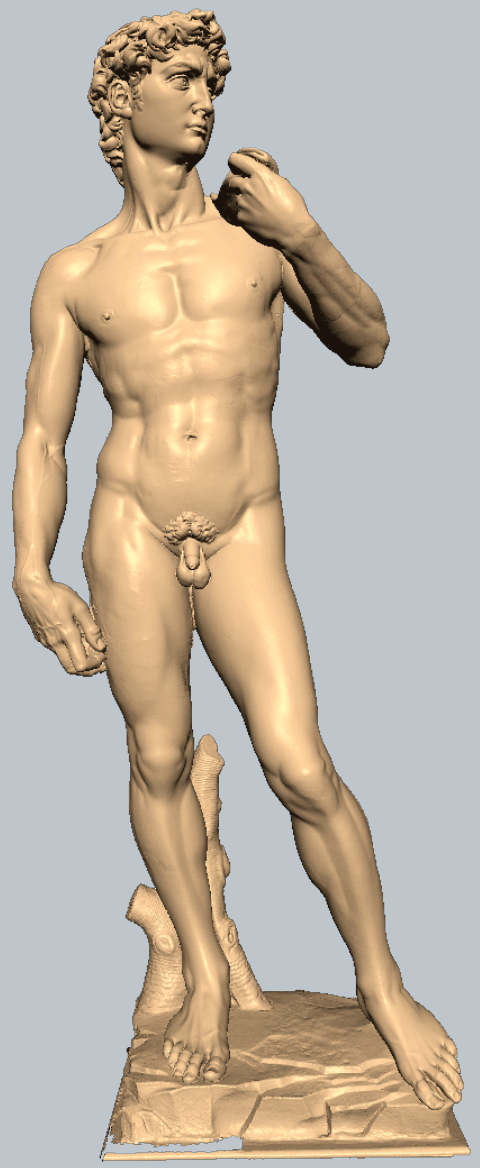

8 million faces

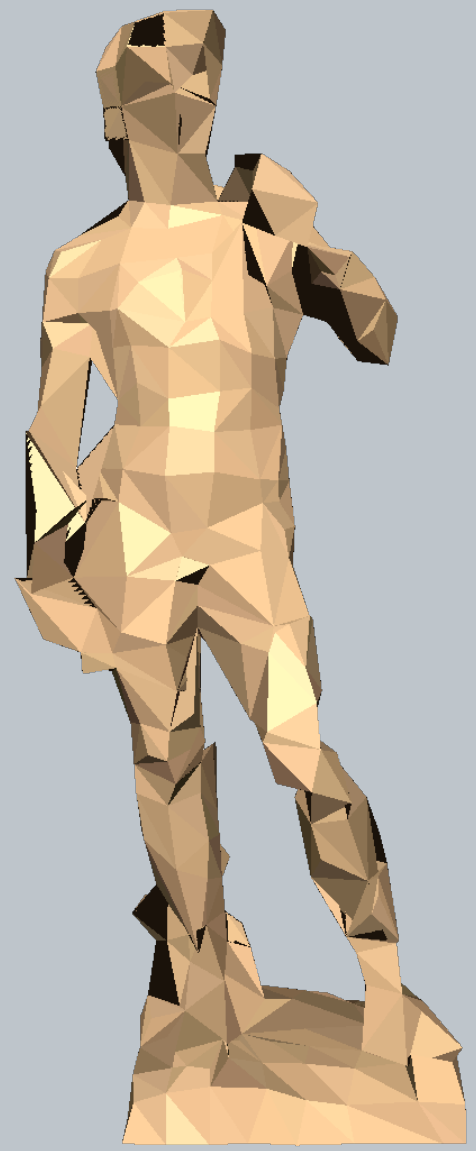

Uniform Grid
(46 seconds)

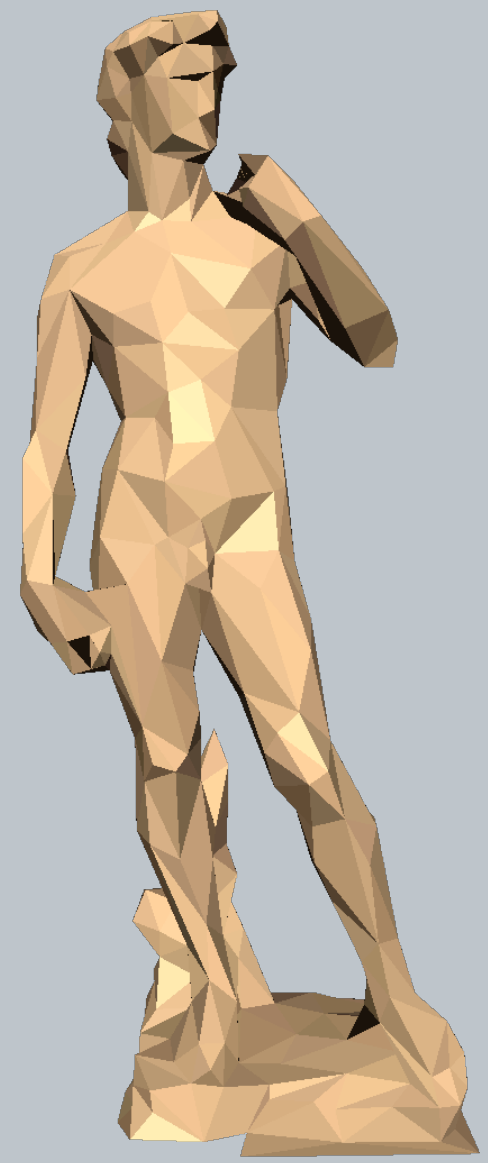

Multiphase
(65 seconds)

St. Matthew Sample

300 million

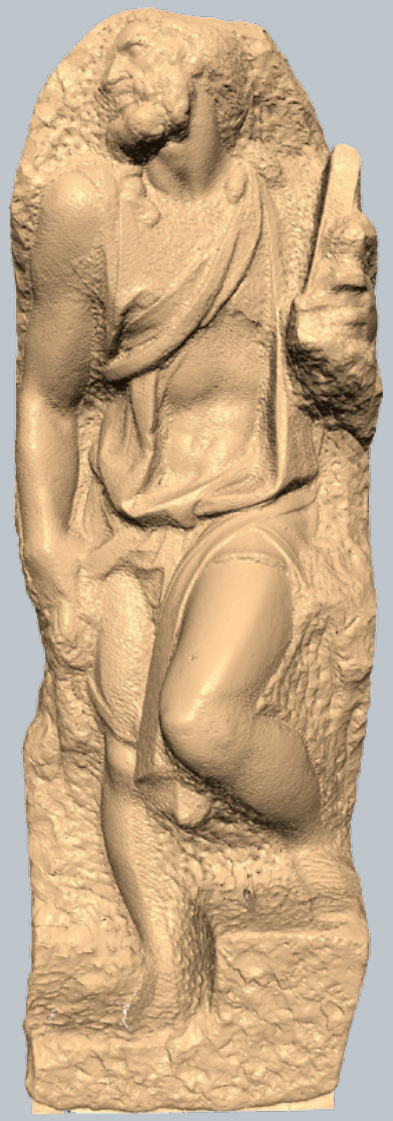

1 million

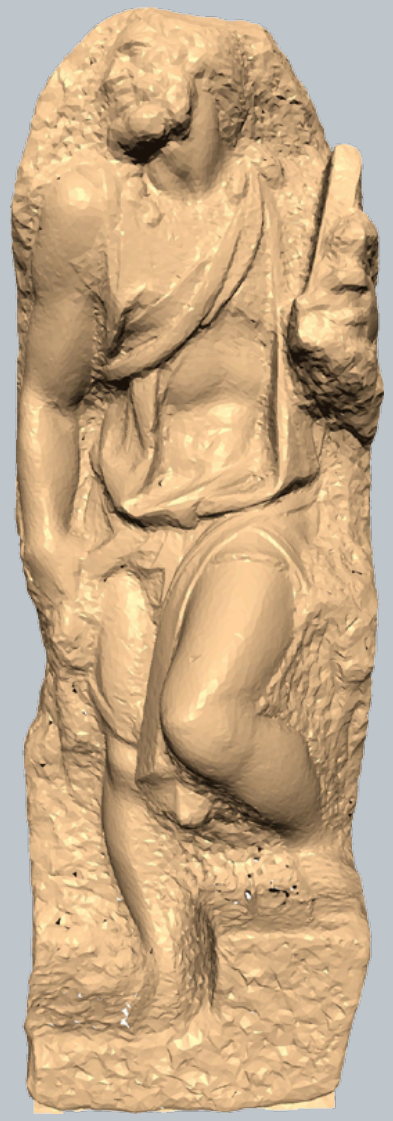

100,000

5000

What is Simplification?

Simplification is Partitioning

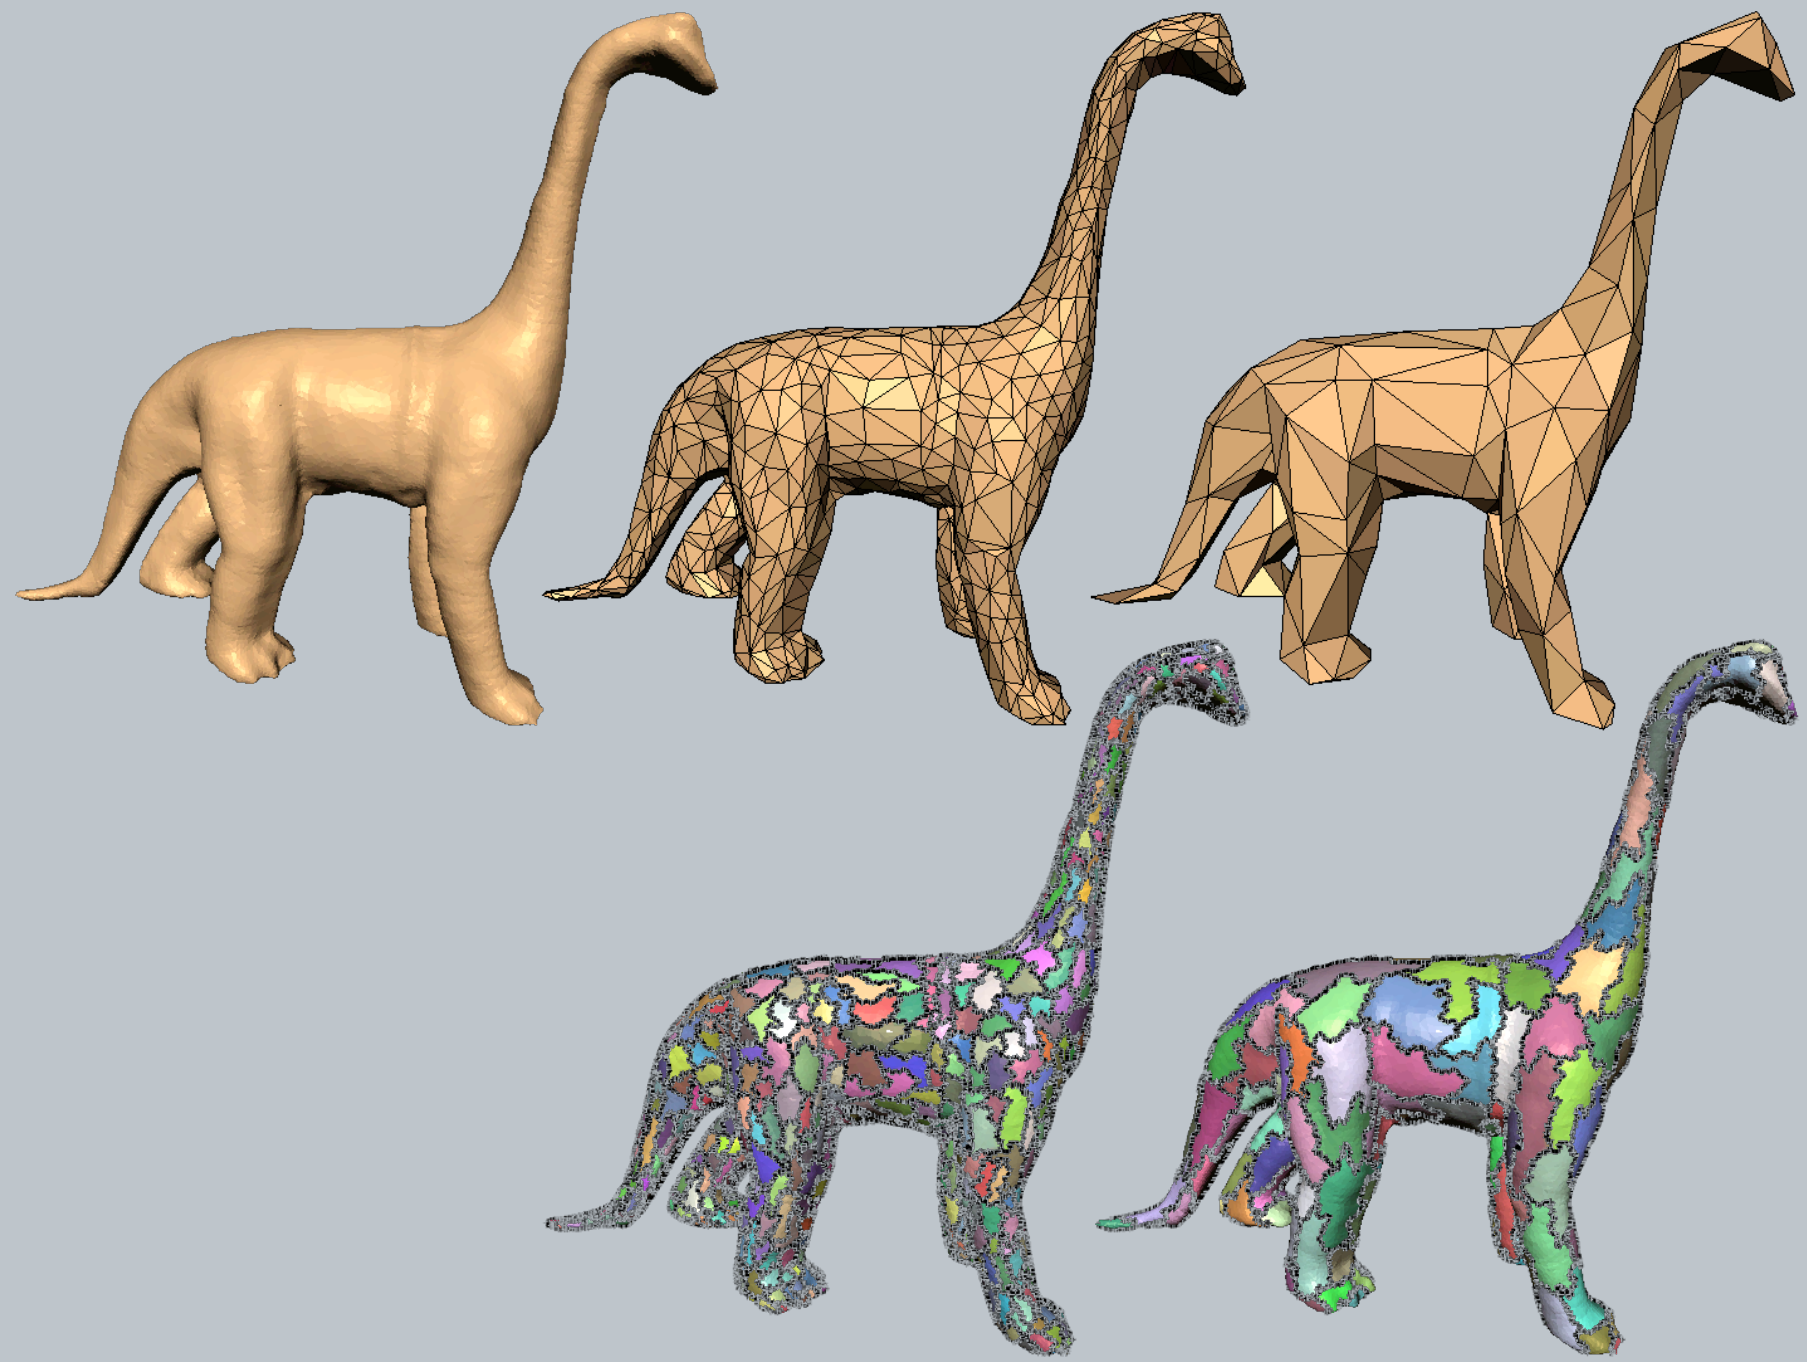

Conclusion

Summary

- Handles non-manifolds of any dimension
- Attractive blend of efficiency and quality
- Simple to implement

- But ... no (real) quality guarantees

Extreme Complexity Remains Hard

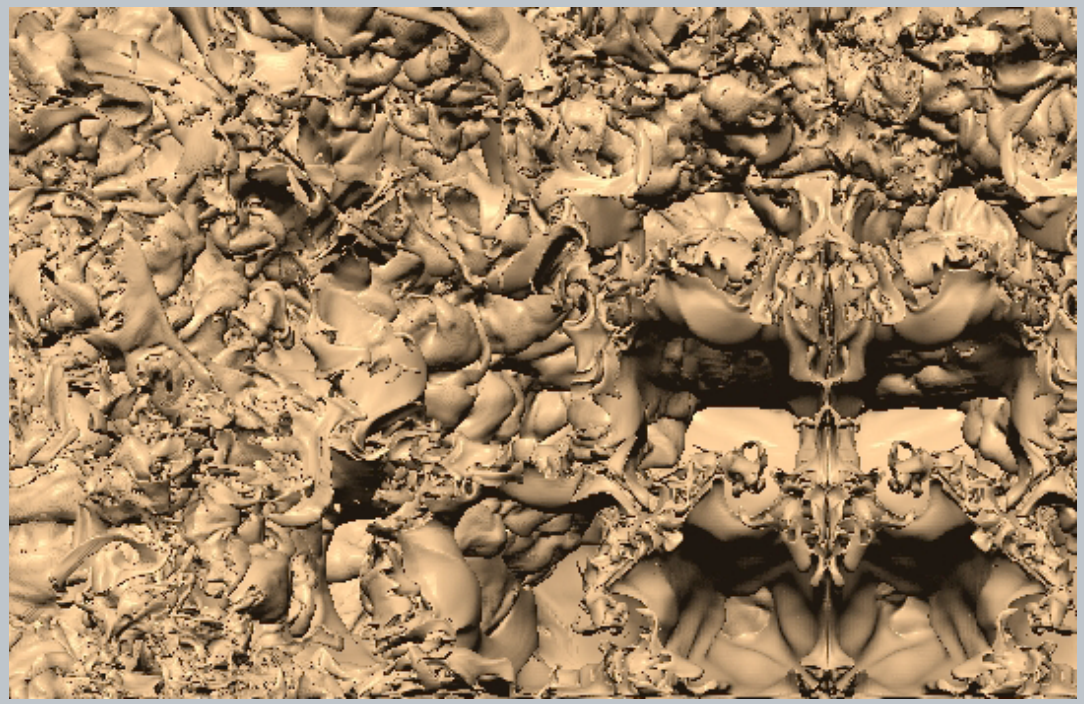

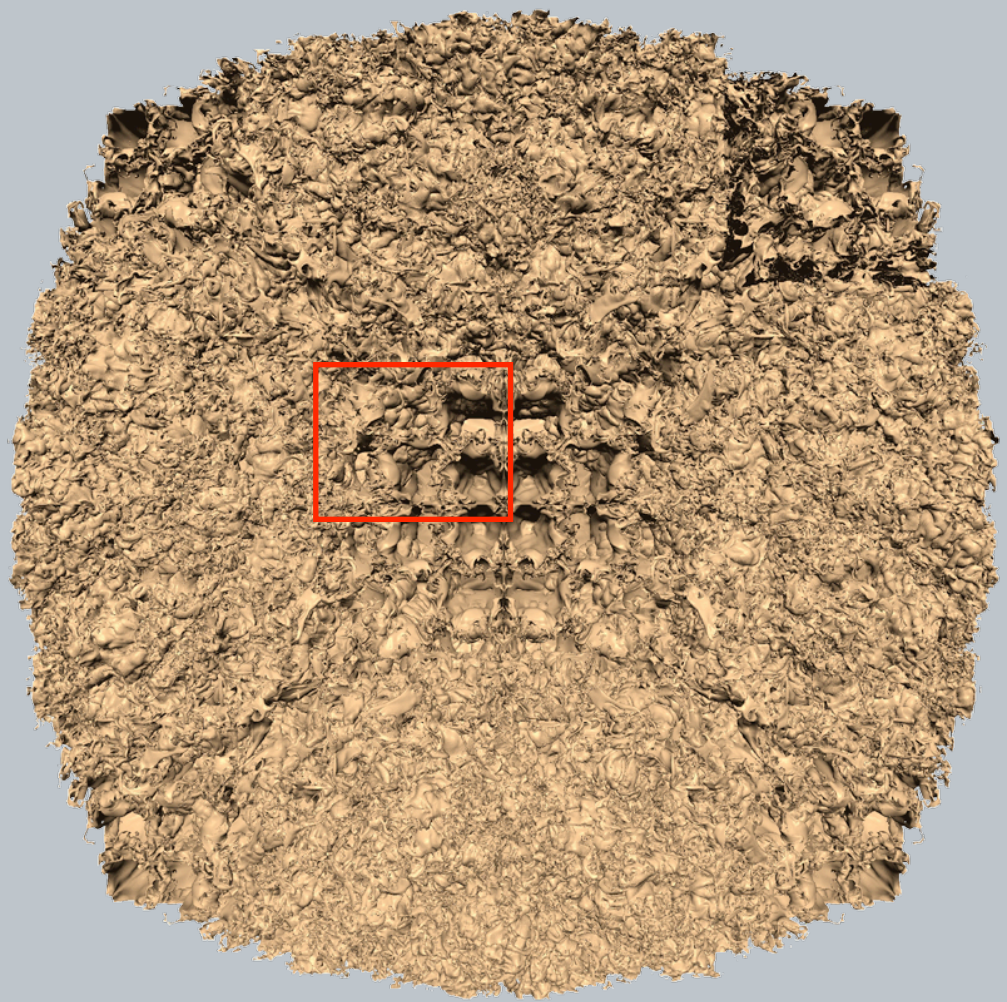

Questions?

Random Clippings and Experiments

Random Math

$$\left((\mathbf{x}-\mathbf{p})^{\mathsf{T}}\mathbf{n}\right)^2$$

$$\mathbf{A} = \mathbf{n}\mathbf{n}^{\mathsf{T}} \qquad \mathbf{b} = -\mathbf{A}\mathbf{p} \qquad c = \mathbf{p}^{\mathsf{T}}\mathbf{A}\mathbf{p}$$

$$Q(\mathbf{x}) = \mathbf{x}^{\mathsf{T}}\mathbf{A}\mathbf{x} + 2\mathbf{b}^{\mathsf{T}}\mathbf{x} + c$$

$$\nabla Q(\mathbf{x}) = 0$$

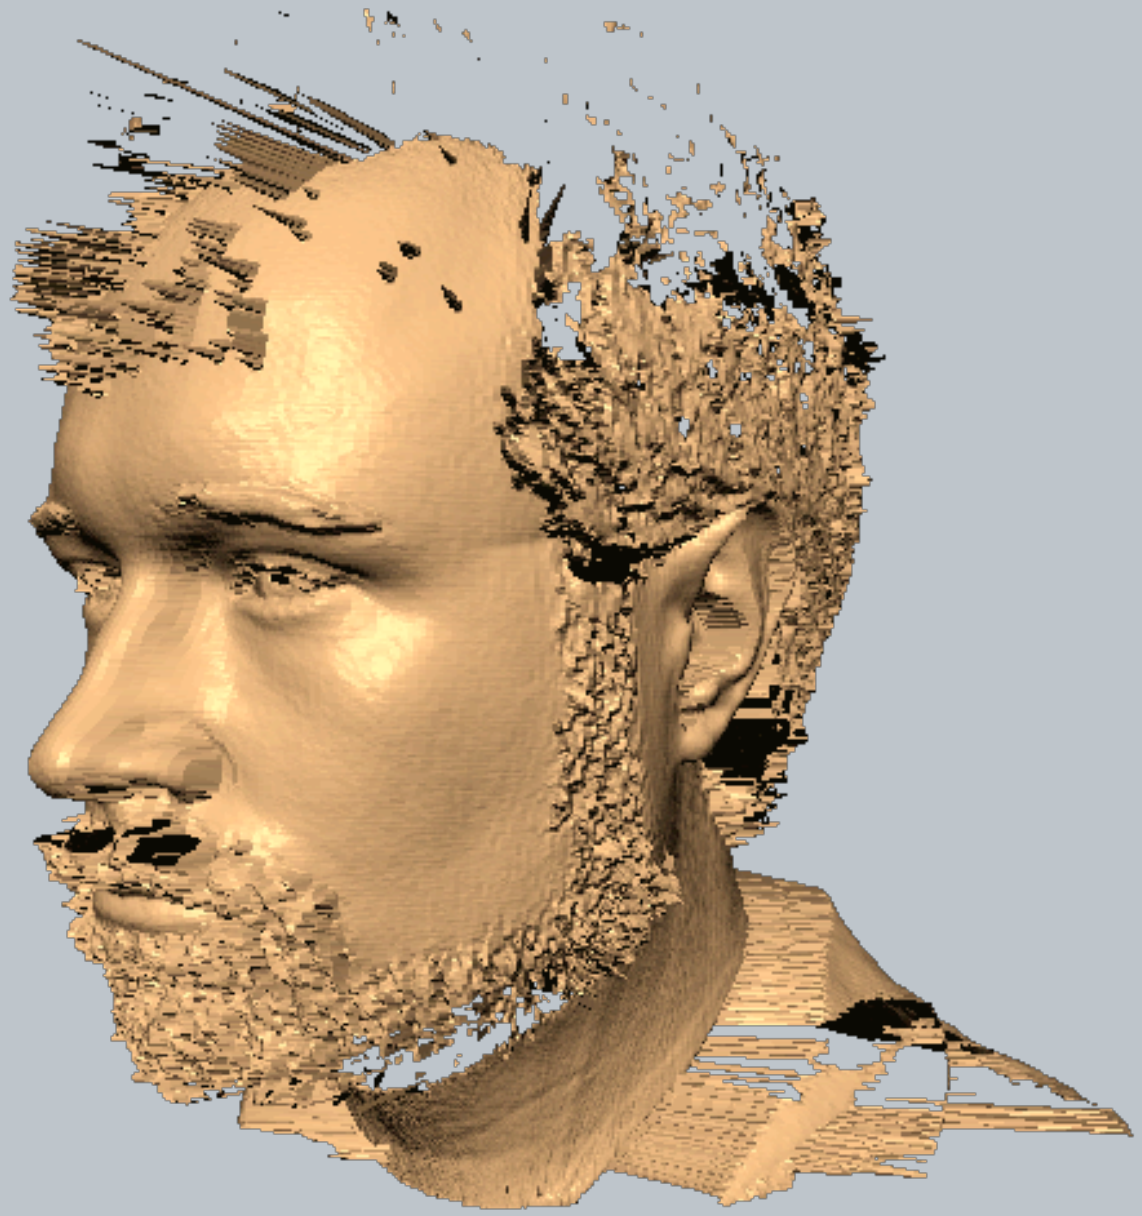

ILLINOIS

1867

UNIVERSITY OF ILLINOIS AT URBANA-CHAMPAIGN

TM

Swatches

From Apple's default "White" theme

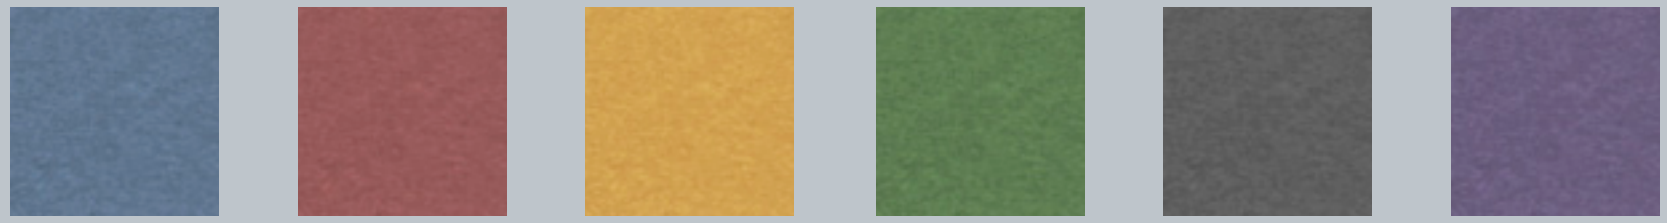
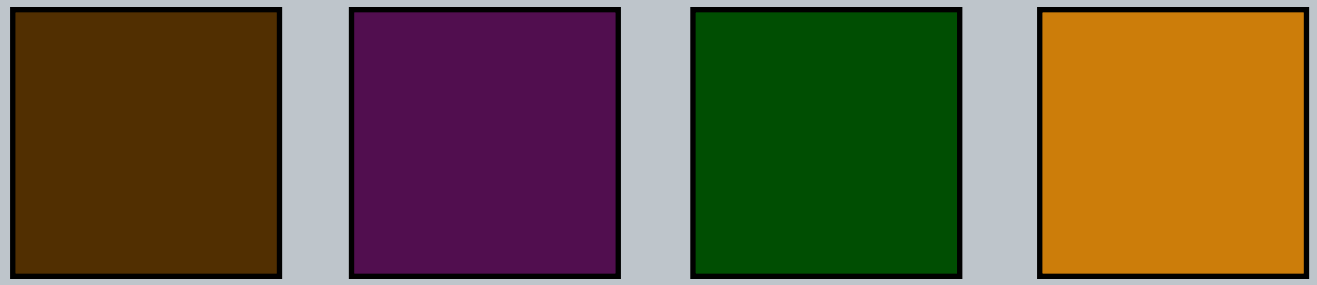
Some custom colors that I was playing around with